



General Technical




Burst Test



Leak Test



Hardness Test

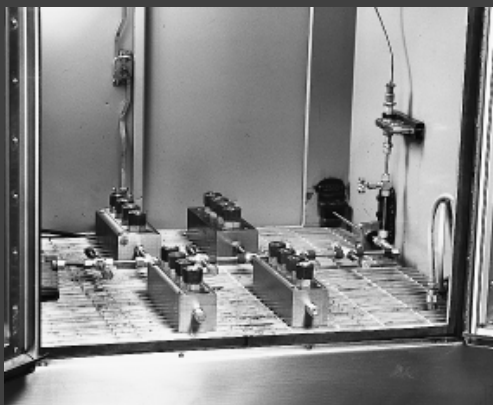

Impulse Test



Vibration Test

The Fitting Authority

How To Order	U3
Standard Nomenclature (Seal-Lok, Triple-Lok, Ferulok, Intru-Lok, JIS and K4)	U3
Hydraulic Flange Nomenclature	U4
EO/EO-2 Nomenclature	U5
 Connectors for World Class Products	 U6
 Conformance Standards	 U9
 Compatibility	 U10
Media Compatibility	U10
Material Compatibility	U10
Corrosion of Base Metals in Contact	U12
O-Ring / Seal Material Selection	U13
 Tube Selection	 U14
Tube and Fitting Material Compatibility	U14
Determining Tube Size	U15
Recommended Flow Diameters	U17
Inch Tube Pressure Ratings	U19
Metric Tube Pressure Ratings	U21
 Tube Fitting Pressure Drop	 U22
 Fitting and Adapter Pressure Ratings	 U24
 Port Details	 U25
ISO 6149-1 (Metric ORB)	U25
SAE J1926-1 (SAE-ORB)	U26
SAE Straight Thread Connector Use in MS33649	U27
ISO 6162 / SAE J518 (Code 61/62)	U28
ISO 1179-1 (BSPP)	U29
ISO 9974-1	U30
NPT / NPTF	U31
 Port End Summary	 U32
Tube-to-Port Pairings	U32

How to Order Seal-Lok, Triple-Lok, Ferulok, Intru-Lok, JIS and K4

TFD Standard Nomenclature Construction

Box 1	Box 2	Box 3	Box 4	Box 5
Size	Shape or Style	Sub-Style	Type	Material
1 to 4 sets of numbers from Box 1	Letter code from Box 2	Number/Letter code from Box 3	Number/Letter code from Box 4	Letter code from Box 5

Example: Steel Seal-Lok Adjustable Elbow Connector –
3/8" O.D. (-6) Tube to 7/16-20 UNF (-4) ORB =

6-4 C5L-S

(See the shading in the boxes below for the construction of this example)

Tube End		Port End		Port End	
Dash Size	Tube O.D.	Dash Size	SAE Straight Thread	Dash Size	NPTF Pipe Thread
-2	1/8	-2	5/16-24	-2	1/8
-3	3/16	-3	3/8-24	-2	1/8
-4	1/4	-4	7/16-20	-2	1/8
-5	5/16	-5	1/2-20	-2	1/8
-6	3/8	-6	9/16-18	-4	1/4
-8	1/2	-8	3/4-16	-6	3/8
-10	5/8	-10	7/8-14	-8	1/2
-12	3/4	-12	1 1/16-12	-12	3/4
-14	7/8	-14	1 3/16-12	-12	3/4
-16	1	-16	1 5/16-12	-16	1
-20	1 1/4	-20	1 5/8-12	-20	1 1/4
-24	1 1/2	-24	1 7/8-12	-24	1 1/2
-32	2	-32	2 1/2-12	-32	2

Straights	
B	Nut
F*	Male Connector
FF*	Long Male Connector or Pipe Nipple
FFF*	Extra Long Connector or Long Pipe Nipple
FN	Cap
G*	Female Connector
H	Union
HH	Long Union
HPN*	Plug, Straight Thread, Hollow Hex
LH	Large Hex Union
PN*	Plug, Straight Thread, Hex Head
T	Sleeve or Ferrule
TP	Sleeve, Parflange
TR	Tube Reducer
T22	Mountie
W	Bulkhead Union
WF	Bulkhead Male
WG	Bulkhead Female
WLN	Bulkhead Locknut for Triple-Lok, Ferulok and Intru-Lok
WLNL	Bulkhead Locknut for Seal-Lok
90° Elbows	
C*	Male Elbow Connector
CC*	Long Male Elbow
CCC*	Extra Long Male Elbow
D	Female Elbow
E	Union Elbow
WE	Bulkhead Union Elbow
45° Elbows	
N	Union Elbow
V*	Male Elbow Connector
WN	Bulkhead Union Elbow
Tees	
J	Union Tee
M	Female Run Tee
O	Female Branch Tee
R*	Male Run Tee
S*	Male Branch Tee
WJ	Bulkhead Branch Tee
WJJ	Bulkhead Run Tee
Cross	
K	Union Cross

Connectors (a)	
3	BSPT Port End
4	BSPP Port End, O-ring & RR
5	SAE Straight Thread Port End
8	Metric Port End, O-ring & RR
9	SAE-ORB with Metal Seal
42	BSPP Port End, "ED" Seal
47	BSPP O-ring Port, B2351
82	Metric Port End, "ED" Seal
87	ISO 6149 Port End
J4 (e)	Banjo Connection, BSPP, Soft Seal
J8 (e)	Banjo Connection, Metric, Soft Seal
Swivel Unions (b)	
6	Female Swivel
Swivel Connectors (c)	
63	BSPT Port, Swivel Connector
64	BSPP Port, Swivel Connector
642	BSPP, "ED" Seal, Swivel Connector
65	SAE-ORB, Swivel Connector
68	Metric Port, Swivel Connector
682	Metric Port, Swivel Connector
687	ISO 6149, Swivel Connector
Straight Thread Plugs (d)	
4, 5, 8, 9 and 87 as in Connectors above.	
Notes	
a. Modifiers for Connectors as noted with asterisk in Box 2. Series L (light) and S (heavy), for male connectors is determined by type of fitting. S – for Seal-Lok L – for all other types	
b. Modifier for C, V, R, S, H, E and J in Box 2.	
c. Modifiers for F only in Box 2.	
d. Modifiers for P only in PN and HPN in Box 2.	
e. Applies to 90° elbows and tees only.	

I	Intru-Lok
K4	60° Cone BSPP
L	Seal-Lok
P4	JIS 60° Cone
T4	JIS 30° Flare
U	Ferulok
X	Triple-Lok

B	Brass
CUNI	Cupro-Nickel (ex. CUNI 70/30)
D	Dural (Aluminum)
M	Monel
S	Steel w/zinc plating
SS	Stainless Steel, 316/316L passivated

How to Order 4-Bolt Hydraulic Flanges

TFD Standard Nomenclature Construction

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7
Flange Size	Connection Description	Shape	Flange Connection Type	Mounting Style	Material	Kit Designation

Box 1 – Port / Tube / Pipe Flange Size

Symbol	Description
One- to two-digit codes	Size in inches x 16

One code is required if end connections are the same size. Two codes are required if they are different sizes (e.g., 16-12).

Box 2 – Port / Tube / Pipe Connection Description

Symbol	Description
B3	Braze Socket – silver braze
CP1	Connector Plate – Code 61
CP2	Connector Plate – Code 62
FCC1	Flange Clamp, Captive – Code 61
FCC2	Flange Clamp, Captive – Code 62
FCCT1	Flange Clamp, Captive with Tapped Holes – Code 61
FCCT2	Flange Clamp, Captive with Tapped Holes – Code 62
FCS1	Flange Clamp, Split – Code 61
FCS2	Flange Clamp, Split – Code 62
G	NPTF Port
G3	BSPT Port
G4	BSPP Port
G5	SAE Port
P	Plug (blanking end)
SP	Spacer w/o Gage Ports
SPG	Spacer w/ 1/4-18 NPTF Gage Port
SPG5	Spacer w/ 7/16-20 UNF Gage Port
SPGG5	Spacer w/ 1/4-18 NPTF & 7/16-20 UNF Ports
WSD1	Weld Saddle – Pipe
WSD2	Weld Saddle – Tube
W4	Flat Weld Socket – Tube
W4S	Flat Weld Socket – Tube (shallow)
W5	Flat Weld Socket – Pipe
W5S	Flat Weld Socket – Pipe (shallow)
W6	Extended Weld Socket – Tube
W6S	Extended Weld Socket – Tube (shallow)
W7	Extended Weld Socket – Pipe
W7S	Extended Weld Socket – Pipe (shallow)
WB1	Weld Butt – Schedule 40
WB3	Weld Butt – Schedule 80
WB5	Weld Butt – Schedule 160
WB7	Weld Butt – Schedule XXS
WBT	Weld Butt – Tank Pilot
WPL	Weld Plate
W	Weld Socket
W2	Weld Nipple
W3 or WB	Weld Nipple – Weld Butt, Tube

Box 3 – Shape Description

Symbol	Description
None	Block and Pad, Straight*
E	Elbow 90°
H	Barstock, Straight
J	Tee

* The “Block” has O-ring and drilled mounting holes, while the “Pad” has no O-ring groove and tapped mounting holes.

Box 4 – Flange Connection Type

Symbol	Description
Q1	Code 61 Flange Head w/ O-ring Groove
Q1N	Code 61 Flange Head w/o O-ring Groove
Q2	Code 62 Flange Head w/ O-ring Groove
Q2N	Code 62 Flange Head w/o O-ring Groove
Q1B	Code 61 Flange Block w/ O-ring Groove and Drilled Mounting Holes
Q1P	Code 61 Flange Block w/o O-ring Groove and Drilled Mounting Holes
Q2B	Code 62 Flange Block w/ O-ring Groove and Drilled Mounting Holes
Q2P	Code 62 Flange Pad w/o O-ring Groove and Tapped Mounting Holes
QSB	Square Flange Block w/ O-ring Groove and Drilled Mounting Holes
QSP	Square Flange Pad w/o O-ring Groove and Tapped Mounting Holes

Box 5 – Mounting Style

Symbol	Description
Omit	Inch Mounting Bolts (screws)
M	Metric Mounting Bolts (screws)

Box 6 – Material

Symbol	Description
S	Steel, Zinc Plated (braze or weld parts may not be plated)
SX	Steel, Oil Dipped
SS	Stainless Steel

Box 7 – Kit Designation

Symbol	Description
Omit	Flange Only
K	Kit (O-ring, 4 bolts and washers)

How to Order EO and EO-2 Fittings and Accessories

TFD Standard Nomenclature Construction

Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	Box 8	Box 9
Shape / Style	Tube Size (mm)	EO-2 Designator	Pressure Series	Port Size / Designator	Port Sealing Method Modifier	Modifier 1	Material	Modifier 2

Box 1 - Shape/Style Code			
Straights		Tees	
AS	Weld Connector	EL	Swivel Nut Run
AS_ /	Weld Flange	ET	Swivel Nut Branch
BFG	Square Flange Connector	GMA1/	Union w/ Test Point, Pin
DA	Distance Adapter	GMA3/	Union w/ Test Point, M16x2
DG101/	Rotary Union	LEE	Adjustable Run
DG102/	Rotary Connector	T	Union
DG107/	Rotary Bulkhead Union	TEE	Adjustable Branch
DVGE	Plain Bearing Rotary	TH	High Pressure Banjo
EGE	Swivel Nut Connector	TR	Reducer Union
EGEO	ISO 6149 Swivel Nut Connector	WV	Alternating Valve
ESV	Weld Bulkhead Union	Cross	
G	Union	K	Union
GAI	Female Connector	Accessories	
GE	Male Connector	D	Cutting Ring
GEO	ISO 6149 Connector	DKA	Metal Seal Ring
GFS_ /	Flange Connector	DKI	Pressure Gage Seal
GR	Reducer Union	DOZ	EO-2 Seal Ring
GZ	Swivel Union	DPR	Progressive Ring
GZR	Reducer Swivel Union	E	Insert
MAV	Gage Connector	ED	EOlastic Seal
MAVE	Swivel Nut Gage Connector	FM	EO-2 Functional Nut
RED	Tube End Reducer	GM	Bulkhead Locknut
SKA	Weld Adapter	KD	Plastic Seal
SV	Bulkhead Union	KDS	Elastomeric Seal
VKA1/	Test Point Connector, Pin	M	Tube Nut
VKA3/	Test Point Connector, M16x2	OR	O-ring
90° Elbows		PSR	Progressive Ring (new)
BFW	Square Flange Connector	R	Tube
DG103/	Rotary Union	ROV	Plug
DG104/	Rotary Connector	VH	Insert
DG108/	Rotary Bulkhead Union	VKA	Cap
DVWE	Plain Bearing Rotary	VSTI	Hollow Hex Plug
EW	Swivel Nut	Valves	
SWVE	Banjo	RHD	Union Check
W	Union	RHZ	Connector Check
WAS	Weld Connector	RHZ	Connector Check
WE	Male Connector	RHDI	Female Check
WEE	Adjustable	RVP	Cartridge Check
WFS_ /	Flange Connector	DV	Low Pressure Shut Off
WH	High Pressure Banjo	LD	Medium Pressure Shut Off
WSV	Bulkhead Union	VDHA	High Pressure Shut Off
Double 90° Elbows		VDHB	High Pressure Shut Off
DG105/	Rotary Union	KH	2-way Ball Valve
DG106/	Rotary Connector	KH3/2-	3-way Ball Valve
45° Elbows		WV	Alternating Union Tee
EV	Swivel Nut		
VEE	Adjustable		

Box 2 – Tube Size (mm)
04
05
06
08
10
12
14
15
16
18
20
22
25
28
30
35
38
42

Box 3 – EO-2 Designator	
Z	EO-2 Assy.

Box 4 – Pressure Series	
LL	Very light
L	Light
S	Heavy

Box 5 – Port Size / Designator (optional)	
Metric	
M_	Metric Parallel
M_X_	Metric Parallel (Jump Size)
M_X_keg	Metric Taper
NPT – Inch	
1/8NPT	NPT Thread
1/4NPT	NPT Thread
3/8NPT	NPT Thread
1/2NPT	NPT Thread
3/4NPT	NPT Thread
1NPT	NPT Thread
1 1/4NPT	NPT Thread
1 1/2NPT	NPT Thread
SAE-ORB	
7/16UNF	Inch Parallel Thread
9/16UNF	Inch Parallel Thread
3/4UNF	Inch Parallel Thread
3/4UNF	Inch Parallel Thread
7/8UNF	Inch Parallel Thread
1 1/16UN	Inch Parallel Thread
15/16UN	Inch Parallel Thread
1 5/8UN	Inch Parallel Thread
1 7/8UN	
BSPP/BSPT	
R_	BSPP
R_/_keg	BSPT

Box 6 – Port Sealing Method Modifier (optional)	
ED	EOlastic Seal
OR	ISO 6149 O-ring
KDS	Banjo Seal-Ring

Box 7 – Modifier 1 (optional)	
OMD	Without Nut and Sleeve
VIT	FPM (omitted for Stainless)
NBR	Nitrile Seals (omitted for Steel and Brass)
-- B	Special Cracking Pressure (check valve)

Box 8 – Material	
A3C	Steel, Zinc Yellow Plated
A3K	Steel, Zinc Clear Plated
MS	Brass
71	Stainless Steel
VZ	Zinc Plated (tube only)

Box 9 – Modifier 2 (optional)	
X	Unassembled

Connectors For World Class Products

Connector Proliferation:

Today many different types of connectors are being used around the world. Most of these have come about through historical use and local preference for a certain design concept. Some connections of the North American origin such as four bolt flange, SAE straight thread and 37° flare have found some degree of acceptance and use in Europe and Japan as a result of the exports of U.S. machinery to the regions after World War II. But, large majority of usage is made up of a variety of indigenous port and tube connections. A quick review of the commonly used connections around the world reveals that there are eight different port connections and eleven different tube/hose connections.

Port Connections:

NPTF	ISO 6149 (Metric Straight Thread O-ring Port)
SAE Straight Thread (UN/UNF)	JIS-PT (BSPT)
4-Bolt Flange	JIS-B2351 (BSPP similar to SAE)
ISO 1179 (BSPP)	
ISO 9974 (Metric)	

Tube/Hose Connections:

37° Flare (SAE)	30° Flare, BSPP (JIS)
24° Flareless, Inch Threads (SAE)	24° Flareless, Metric (JIS)
60° Cone Swivel, NPSM (SAE)	60° Cone, BSPP (JIS)
O-Ring Face Seal (SAE)	60° Cone, Metric (JIS)
24° Cone, Metric (DIN)	37° Flare, Metric (Russia)
60° Cone, BSPP (BSi)	

The Challenge:

Leakage is no longer acceptable in world class products. Above proliferation, besides limiting availability and increasing cost, increases leakage potential through misapplications. Therefore, the challenge facing the fluid power industry is two fold — eliminate leakage and minimize proliferation.

Meeting The Challenge:

This challenge has been met through a very intensive and co-operative effort by the member nations of sub-committee 4 of the ISO Technical Committee 131 (ISO/TC131). The subcommittee started this effort in 1989 and has completed development of performance based standards for the most widely used ports and tube/hose connections to limit proliferation, and strongly endorsing those with elastomeric seals to eliminate leakage in hydraulic systems.

Five ports, four threaded and the four bolt flange, and four tube/hose connections as shown on the following page (Fig. U1) have been standardized. The threaded ports and tube/hose connections are paired in the ISO 8434 series of fitting standards as defined in the table below.

To minimize proliferation in port usage and promote leak free connections, the sub-committee strongly endorses use of ISO 6149 port for all new designs by including the following statement in all port standards:

“For threaded ports and stud ends specified in new designs in hydraulic fluid power applications, only ISO 6149 shall be used. Threaded ports and stud ends in accordance with ISO 1179, ISO 9974 and ISO 11926 shall not be used for new designs in hydraulic fluid power applications.”

On the tube/hose connection side, only ISO 8434-3 (O-ring Face Seal) and ISO 8434-4 (24° cone with weld nipple) feature elastomeric seal for zero leak performance. Combining these with the ISO 6149 for the port connection leads to two (2) combinations (complete fittings) for use in leak-free world class products. They are:

ISO 8434-3	O-ring Face Seal and ISO 6149 Port
ISO 8434-4	24° Cone With Soft Seal and ISO 6149 Port

For large port connections, the four bolt flange connection per ISO 6162 (SAE J518 is included in ISO 6162) remains widely used and the recommended connection.

Application	Port	Tube/Hose Connection			
		24° Cone Flareless (DIN) (Bite Type)	37° Flare (Inch Threads)	ORFS	24° Cone Weld Nipple
For All Designs	Metric ISO 6149 (SAE J2244)	ISO 8434-1	ISO 8434-2	ISO 8434-3	ISO 8434-4*
Not for New Designs in Hydraulic Fluid Power	BSPP ISO 1179 (DIN 3852-2)	ISO 8434-1	ISO 8434-2	—	ISO 8434-4*
	Metric ISO 9974 (DIN 3852-1)	ISO 8434-1	—	—	ISO 8434-4*
	UN/UNF ISO 11926 (SAE J1926)	—	ISO 8434-2	—	—











Table U1 — ISO Standard Port and Tube/Hose Connection Combinations

* Will be included in ISO 8434-1 at the next revision.

Tube / Hose End Summary

Tube / Hose End Type	Illustration	Pressure – Dynamic	Pressure – Static	Seal Reliability	Vibration Resistance (in Rigid Systems)	Ease of Installation	Ease of Maintenance	Reusability	Temperature
Seal-Lok O-Ring Face Seal		Excellent	Excellent	Excellent	Very Good	Excellent	Excellent	Excellent	Limited by Seal
Triple-Lok 37° Flare		Very Good	Very Good	Good	Good	Good	Very Good	Good	Excellent
Ferulok Inch Bite Type		Very Good	Very Good	Very Good	Very Good	Good	Good	Very Good	Excellent
EO Metric Bite Type		Excellent	Excellent	Very Good	Very Good	Good	Good	Very Good	Excellent
EO-2 Soft Seal Metric Bite Type		Excellent	Excellent	Excellent	Very Good	Very Good	Good	Excellent	Limited by Seal
Intru-Lok Brass Flareless		Fair (Low)	Fair (Low)	Very Good	Good	Good	Good	Good	Limited by Seal
JIS 30° Flare		Good	Good	Very Good	Not Applicable	Very Good	Very Good	Very Good	Limited by Seal
JIS 60° Cone B8363		Good	Good	Very Good	Not Applicable	Very Good	Very Good	Very Good	Limited by Seal
Komatsu 30° Flare		Good	Good	Very Good	Not Applicable	Very Good	Very Good	Very Good	Limited by Seal
K4 BSP Adapters		Good	Good	Very Good	Not Applicable	Very Good	Very Good	Very Good	Limited by Seal
NPSM (Swivel)		Good	Good	Very Good	Not Applicable	Good	Very Good	Very Good	Limited by Seal

Port End Summary

Port End Type and Seal Style	Illustration	Pressure – Dynamic	Pressure – Static	Temperature	Positioning	Contamination	Seal Reliability	Reusability	Fluid Compatibility
Tapered (NPT, NPTF, BSPT and Metric Taper)		Poor	Good	Excellent	Poor	Poor	Poor	Poor	Excellent
O-Ring in Chamfer (SAE J1926, ISO 6149 and JIS B2351)		Excellent	Excellent	Limited by Seal	Excellent	Very Good	Excellent	Excellent	Limited by Seal
Spot Face with ED Seal (ISO 1179-2 and ISO 9974-2)		Excellent	Excellent	Limited by Seal	Not Applicable	Very Good	Excellent	Excellent	Good
Spot Face with Bonded Seal (ISO 1179 and ISO 9974)		Good	Good	Good	Not Applicable	Very Good	Good	Excellent	Limited by Seal
Spot Face with Cutting Face (ISO 1179-4 and ISO 9974-3)		Poor	Fair	Excellent	Not Applicable	Fair	Poor	Poor	Excellent
Spot Face with O-Ring and Retaining Ring (ISO 1179-3)		Good	Good	Good	Excellent	Very Good	Good	Excellent	Limited by Seal
Spot Face with Hard Metal Seal (ISO 1179 and ISO 9974)		Poor	Fair	Excellent	Not Applicable	Fair	Poor	Poor	Excellent
Spot Face with Soft Metal Seal (ISO 1179 and ISO 9974 with copper gasket)		Poor	Fair	Good	Not Applicable	Very Good	Poor	Fair	Excellent
4 Bolt Flange (SAE J518 and ISO 6162)		Excellent	Excellent	Good	Good	Very Good	Good	Excellent	Limited by Seal
4 Bolt Flange (ISO 6164)		Excellent	Excellent	Good	Good	Good	Good	Excellent	Limited by Seal

Conformance to Applicable Specifications and Approvals for TFD Products

By Product Type or Subject

Fittings	Specifications	Approvals	
Seal-Lok	SAE J1453	DNV - cert. #P-9538 TUV - For CHG fuel cell applications - stainless	
Metric Seal-Lok	ISO 8434-3	AGA/CGA - Eng. Report #125-AGA1-85 American Bureau of Shipping (ABS) - cert. # 98-C12949-X	
Triple-Lok	SAE J514	Bureau Veritas cert. #2190 1907D00H (steel only)	
	MIL-F-18866, MS Sheets	DNV cert. # P-9085/792-22	
	MS51500 - MS51534	Germanischer Lloyd cert. # 9672890HH	
	BS43687, part 4	U.S. Coast Guard cert.#16703/46 CFR 56.60	
Ferulok	ISO 8434-2	U.S.S.R. Register of Shipping cert. #93.017.260	
	SAE J514		
	MIL-F-18866 MS Sheets MS51811 - MS51843*		
	U.S. Coast Guard - meet applicable requirements of ASTM F1387		
EO/EO-2	DIN 3861	Germanischer Lloyd Lloyd's Register of Shipping	
	ISO 8434-1-4, ISO 8434-4	DNV ABS Russian Maritime Register of Shipping China Classification Society DVGW	
	DIN 3865	TUV	
	DIN 3859		
	Flange Adapters	SAE J518	
		ISO 6162-1	
		ISO 6162-2	
ISO 6164			
JIS Adapters*	JIS B8363 (with some exceptions)		
K4 Adapters	BS 5200, ISO 8434-6**		
Pipe Fittings	SAE J514		
Pipe Plugs	SAE J531		
Straight Thread Plugs	SAE J514		
Pipe Swivel Adapters	SAE J514		

Plating	Specification
Carbon Steel – Zinc with Yellow Chromate	ASTM B633 Type II FE/ZN5
	Federal QQ-Z-325C - Type II class 3
	MIL-STD-171
	JIS 8610 Class 2 Grade 4
Stainless Steel Passivation	QQ-P35 Type VI
	ASTM A380
Carbon Steel – Zinc Phosphate	DOD-P-16232, Class 1

Design	Specification	Comment
All Products	ASME / ANSI B31.1	All products meet the design factor requirements of this specification.

Test Methods	Specification
Leak, Burst, Impulse, Over-Torque and Repeated Assembly	SAE J1644
	ISO 19879**
Vibration	NFPA T3.8.3, ISO 7257

Table U2 — Conformance Standards

* Some parts do not meet dimensional requirements.

** To be published.



Fluid Compatibility

The fluid compatibility chart on the following page is intended as a guide only and is not to be considered as a sole selection criteria to use Parker Tube Fittings in a specific application or with a specific fluid. Other factors that must be considered include, but are not limited to: Fluid temperature, ambient temperature, system pressure (both operating and peak) and applicable standards or regulations. For media not listed, please contact your Parker representative or the Tube Fittings Division.

Protective Coatings on Steel

Protective coatings such as electroplated zinc and cadmium¹⁾ and zinc phosphate are usually applied to steel fittings for extending their useful service life in corrosive environments. Cadmium and zinc corrode sacrificially, protecting the steel substrate from normal atmospheric rusting due to the common presence of oxygen, moisture and acidic gases. They are, however, rapidly attacked by many fluids including those containing acidic hydrogen and reactive fluorine, chlorine, bromine, iodine, and nitrogen. Zinc plating will further be attacked by strong bases or water with pH > 12. **Zinc reacts with glycol based fire resistant fluids and forms a gelatinous compound that can plug up filters and be harmful otherwise, in a system with many zinc plated tube and hose fittings.** Steel fittings with zinc phosphate coating or stainless steel fittings, along with brass fittings in low pressure applications, are viable options.

The other option is to run the fluid through the system, without components with moving parts in it, with an auxiliary power source, to generate and flush the gelatinous compound. Then re-connect all components, change filters and charge the system with new fluid.

Zinc phosphate coatings protect steel by covering its surface and will retard rusting as long as the inhibiting barrier is not broken.

Caution: Where low toxicity and low corrosion are required, as in food or beverage applications, steel coated with any form of zinc or other protective coatings is not recommended.

Notes:

- 1) Cadmium is not allowed by SAE and ISO standards for general industrial and commercial use. Some military applications still require cadmium plating. These requirements are met with special (non-standard) processing at extra cost.

Choosing the Tube Material and Type

Selection of tube material depends on the fluid, corrosive nature of the service environment, the operating temperature range and the maximum operating pressure. The tube O.D. and wall thickness selection depends on these four parameters.

A simple method of selecting the proper tube type and material is described below.

Table U7 lists several common tube types with their recommended operating temperature ranges, general application, and fitting compatibility. Based on the fluid system parameters and media, select the appropriate tube type and material.

If media and/or service environment is different from the commonly used ones listed in the general application column, please [consult the Fluid Compatibility chart on the following page](#) or [contact the Tube Fittings Division](#).

For selecting proper tube O.D. and wall thickness use the procedure given on [page U15](#).

Caution: When working with highly corrosive media, always [consult the Tube Fittings Division](#).

Media	Fitting Material			Seal Material			
	Brass	Steel	316 SS	BUNA-N	Ethylene Propylene	Fluorocarbon	Neoprene
Acetylene	NR	F	S	S	S	S	F
Air (oil free) @ 190° F	S	F	S	S	S	S	S
Air (oil free) @ 300° F	S	F	S	F	F	S	F
Air (oil free) @ 400° F	S	F	S	NR	NR	S	NR
Alcohol, Ethyl	S	NR	NR	NR	S	NR	S
Animal Oils (Lard Oil)	F	F	F	S	F	S	F
Aromatic Fuel - 50%	ID	ID	ID	F	NR	S	NR
Aromatic SolventsID	ID	F	F	ID	S	NR	
Asphalt	NR	NR	S	F	NR	S	F
ASTM Oil #1	S	S	S	S	NR	S	S
ASTM Oil #2	S	S	S	S	NR	S	F
ASTM Oil #3	S	S	S	S	NR	S	NR
ASTM Oil #4	S	S	S	F	NR	S	NR
ATF Oil	S	S	S	S	NR	S	F
Automotive Brake Fluid	ID	ID	ID	NR	S	NR	F
Benzene	NR	F	NR	NR	NR	S	NR
Brine (Sodium Chloride)	NR	NR	S	S	S	S	S
Butane	NR	S	S	S	NR	S	S
Carbon Dioxide	S	F	S	S	S	S	S
Carbon Monoxide	S	S	S	S	S	S	F
Chlorine (Dry)	F	F	NR	NR	ID	F	F
Compressed Air	S	F	S	S	S	S	S
Crude Oil	NR	F	S	F	NR	S	NR
Cutting Oil	ID	S	S	S	NR	S	F
Diesel Fuel	S	S	S	S	NR	S	NR
Ethanol	S	NR	NR	NR	S	NR	S
Ethers	S	S	S	NR	F	F	NR
Freon 11	S	ID	ID	F	NR	F	NR
Freon 12	S	S	NR	F	NR	S	S
Freon 22	S	NR	S	NR	NR	NR	S
Fuel Oil	NR	S	S	S	NR	S	F
Gasoline	S	F	S	S	NR	S	NR
Gas, Liquid Propane (LPG)	S	S	S	S	NR	S	F
Gas, Natural	F	S	S	S	NR	S	S
Helium	S	S	S	S	S	S	S
Hydraulic Oil, Petroleum Base	S	S	S	S	NR	S	S
Hydraulic Oil, Water Base	ID	S	S	F	S	NR	F
Hydrogen Gas	S	S	S	S	S	S	S
Jet Fuel	S	S	S	S	NR	S	NR
Kerosene	S	S	S	S	NR	S	F
Lubricating Oil SAE 10, 20, 30, 40, 50	S	S	S	S	NR	S	F
Methanol	S	S	S	S	S	NR	S
MIL-F-8192 (JP-9)	S	S	S	NR	NR	S	NR
MIL-H-5606	S	S	S	S	NR	S	F
MIL-H-6083	S	S	S	S	NR	S	S
MIL-H-7083	S	S	S	S	S	F	F
MIL-H-8446 (MLO-8515)	F	S	S	F	NR	S	S
Mil-L-2104 & 2104B	S	S	S	S	NR	S	F
MIL-L-7808	NR	F	S	F	NR	S	NR
Mineral Oil	S	S	S	S	NR	S	F
Nitrogen	S	S	S	S	S	S	S
Petrolatum	S	S	S	S	NR	S	F
Petroleum Oil (<250° F)	S	S	S	S	NR	S	F
Propane	S	S	S	S	NR	S	F
R134A	S	S	S	NR	S	NR	NR
Sea Water	F	NR	S	S	S	S	F
Skydrol 500, Type 2	NR	S	S	NR	S	NR	NR
Skydrol 7000, Type 2	NR	S	S	NR	S	F	NR
Soap Solutions	NR	NR	S	S	S	S	F
Steam (<400° F)	F	S	S	NR	S	NR	NR
Stoddard Solvent	F	S	S	S	NR	S	F
Transmission Fluid (Type A)	S	S	S	S	NR	S	F
Trichloroethane	ID	F	S	NR	NR	S	NR
Water	S	F	S	S	S	F	F

Table U4 — Fluid Compatibility Chart

Codes:
 S = Satisfactory
 NR = Not recommended
 F = Fair
 ID = Insufficient data



Corrosion of Base Metals in Contact

The susceptibility of different base metals to corrosion while in contact, depends upon the difference between the contact potentials, or the electromotive voltages of the metals involved. The greater the potential difference is, the greater is the tendency for corrosion. The metal with the higher potential forms the anode and is corroded. In other words, the larger the separation distance in the electromotive chart between the two metals in contact, the higher the contact potential and chances for corrosion. For example, zinc and aluminum are very short distance apart in the chart; therefore potential for corrosion when these two metals are in contact is very low. On the other hand, aluminum and passivated 316 stainless steel are far

apart; hence, when in contact, the potential for corrosion is very high. Aluminum, being more anodic metal, will corrode in this combination.

As a general guideline, if the metals are half the length of the chart or more apart, the combination should be avoided. Also, it is not a good idea to combine an anodic metal part with thin cross section, such as thin wall tubing, with a cathodic or less anodic metal part of a heavy cross section, such as a fitting.

Example: A thin wall brass tube with steel fitting is a better, although not ideal, combination than a thin wall steel tube with brass fitting.

Electromotive or Galvanic Series for Metals	
<p>+ Anodic (least noble) corroded</p> <p>↑</p> <p>Electric current flows from plus to minus</p> <p>↓</p> <p>- Cathodic (most noble) protected</p>	<p>Magnesium Magnesium alloys Zinc (Parker steel fittings are zinc plated) Berillium Aluminum 5052, 3004, 3003, 1100, 6053 Cadmium Aluminum 2117, 2017, 2024 Mild steel (1018), wrought iron, free machining steel (12L14) Low alloy high strength steel, cast iron Chrome iron (active) 430 Stainless (active) 302, 303, 321, 347, 410, 416, stainless steel (active) Ni-resist 316, 317 stainless steel (active) Carpenter 20Cb-3 stainless (active) Aluminum bronze (CA 687) Hastelloy C (active) Inconel 625 (active) Titanium (active) Lead/Tin solder Lead Tin Inconel 600 (active) Nickel (active) 60 Ni-15 Cr (active) 80 Ni-20 Cr (active) Hastelloy B (active) Naval brass (CA 464), Yellow brass (CA 268), Brass (CA360) Red brass (CA 230), Admiralty brass (CA 443) Copper (CA 102) Maganese bronze (CA 675), Tin bronze (CA 903, 905) 410, 416 Stainless (passive) Phospher bronze (CA 521, 524) Silicon bronze (CA 651, 655) Nickel silver (CA 732, 735, 745, 752, 754, 757, 764, 770, 794) Cupro Ni 90-10 Cupro Ni 80-20 430 Stainless steel (passive) Cupro Ni 70-30 Nickel aluminum bronze (CA 630, 632) Monel 400, K500 Silver solder Nickel (passive) 60 Ni 15 Cr (passive) Inconel 600 (passive) 80 Ni 20 Cr (passive) Chrome iron (passive) 302, 303, 304, 321, 347 stainless stainless steel (passive) 316, 317 stainless steel (passive) (Parker stainless steel fittings are passivated) Carpenter 20 Cb-3 stainless (passive), Incoloy 825 Silver Titanium (passive), Hastelloy C & C276 (passive), Inconel 625 (passive) Graphic Zirconium Gold Platinum</p>

Table U5 — Electromotive or Galvanic Series for Metals

O-Ring Material Selection

Standard O-rings supplied with Parker tube fittings and adapters are 90 durometer hard nitrile (Buna-N) Parker compound #N0552. These O-rings are well suited for most industrial hydraulic and pneumatic systems. They have high extrusion resistance making them suitable for very high pressure static applications. Optional high temperature fluorocarbon, Parker compound #V0894, is also available for higher temperature specifications.

O-rings for other than normal hydraulic media or higher temperature applications can be selected from the following chart. The chart should be used only as a general guide. Before making final selection for a given application, it is recommended that appropriate tests be conducted to assure compatibility with the fluid, temperature, pressure and other environmental conditions.

For fluids not shown in the chart, please [contact the Tube Fittings Division](#).

Polymer	Abbreviated Name	Parker Compound No.	Color	SAE J515 Type	Hardness Shore "A" ⁽⁷⁾	Temperature Range	Recommended For	Not Recommended For
Nitrile-Butadiene	NBR	N0552	Black	CH ⁽²⁾	90 ⁽⁶⁾	-30° to 250° F	Petroleum base oils and fluids, mineral oils, ethylene glycol base fluids, silicone and di-ester base lubricants, air, water under 150°F, and natural gas. Hydrogen fuel cells. Meets FDA requirements for food products. CNG Applications	Phosphate ester base hydraulic fluids, automotive brake fluids, strong acids, ozone, freons, ketones, halogenated hydrocarbons, and methanol.
Nitrile-Butadiene	NBR	N0674	Black	–	70	-30° to 250° F		
Nitrile-Butadiene	NBR	N0103	Black	–	70	-65° to 225° F		
Nitrile-Butadiene (Low compression set)	NBR	N1059	Black	CH ⁽²⁾	90	-30° to 275° F		
Nitrile-Butadiene	NBR	N0507	Black	–	90	-65° to 180° F		
Nitrile-Butadiene	NBR	N0304	Black	–	75	-65° to 225° F		
Nitrile-Butadiene	NBR	N0508	Black	–	75	-35° to 250° F		
Nitrile-Butadiene	NBR	N0756	Black	–	75 ⁽⁶⁾	-65° to 275° F		
Ethylene-Propylene	EPDM	E0540	Black	CA ⁽³⁾	80	-65° to 275° F	Phosphate ester base hydraulic fluids, hot water, steam to 400°F, silicone oils and greases, dilute acids and alkalis, ketones, alcohols and automotive brake fluids. CO ₂ climate control systems.	Petroleum base oils and di-ester base lubricants.
Ethylene-Propylene	EPDM	E0893	Purple ⁽¹⁾	CA ⁽³⁾	80	-65° to 275° F		
Ethylene-Propylene	EPDM	E0962	Black	–	90	-65° to 275° F		
Neoprene	CR	C0873	Black	–	70	-45° to 250° F	Refrigerants (freons, ammonia), high aniline point petroleum oils, mild acids, and silicate ester lubricants.	Phosphate ester fluids and ketones.
Neoprene	CR	C0944	Red ⁽¹⁾	–	70	-45° to 250° F		
Fluorocarbon	FKM ⁽⁵⁾ or FPM	V0747 V0884 V0894	Black Brown ⁽¹⁾ Brown ⁽¹⁾	– – HK ⁽⁴⁾	75 75 90 ⁽⁶⁾	-15° to 400° F -15° to 400° F -15° to 400° F	Petroleum base oils and fluids, some phosphate ester base fluids, silicone and silicate ester base lubricants, di-ester base lubricants, acids and halogenated hydrocarbons.	Ketones, skydrol fluids, amines (VDMH), anhydrous ammonia, low molecular weight esters and ethers, and hot hydrofluoric or chlorosulfonic acids.
Silicone	Si	S0604	Rust ⁽¹⁾	–	70	-65° to 450° F	Dry heat (air to 400°F) and high aniline point oils.	Most petroleum fluids, ketones, water and steam.

Table U6 — O-Ring Selection

- 1) These Parker "Chromasure" color assurance O-rings are available from the Parker Hannifin O-Ring Division. They help eliminate assembly errors, reduce warranty costs and liability risks, and assure safety in aftermarket business.
- 2) Formerly SAE Type I.
- 3) Formerly SAE Type II.
- 4) Formerly SAE Type III.
- 5) "FKM" is the ASTM designation for fluorocarbon. Its ISO designation is "FPM".
- 6) Standard compounds available from stock.
- 7) Use 90 durometer hard O-rings for applications with 1500 psi or higher pressures.

Tube and Fitting Material Compatibility

As a general rule, tube and fitting materials should be the same. If different materials must be considered, the following chart can be used as a general guide. Since operating conditions differ with applications, this chart should be used only as a guide and not a firm recommendation. Before making a final

decision on material combination, it should be sufficiently tested under appropriate conditions to assure suitability for the intended application. For additional material combinations, [contact the Tube Fittings Division](#).

Tube Material	Specification	Construction	Condition	Max. Hardness	Temperature Range (7)	Application	Tube Material to Fitting & Material Compatibility														
							Seal-Lok ORFS (SAE J1453)			Triple-Lok 37° Flare (SAE J514)				Ferulok Flareless (SAE J514)			Intru-Lok Flareless	EO / EO-2 Flareless (ISO 8434-1)			
							S	SS	B	S	SS	B	M	S	SS	M	B	S, SS, B, M			
Carbon Steel C-1010	SAE J524 (ASTM A179) (8)	Seamless	Fully Annealed	HRB 72	-65° to 500°F -55° to 260°C	High pressure hydraulic, air, & some specialty chemicals	E	NR	(6)	G	NR	(6)	NR	E	NR	NR	NR	NR			
	SAE J525 (ASTM A178) (8)	Welded & Drawn					E	NR	(6)	E	NR	(6)	NR	E	NR	NR	NR	NR			
	SAE J356	Welded & Flash Controlled					G	NR	(6)	NR	NR	(6)	NR	G	NR	NR	NR	NR			
Carbon Steel C-1021	SAE J2467	Welded & Flash Controlled	Fully Annealed	HRB 75	-65° to 500°F -55° to 260°C	High pressure hydraulic	E	NR	(6)	NR	NR	(6)	NR	E	NR	NR	NR	NR			
	SAE J2435	Welded & Drawn					E	NR	(6)	E	NR	(6)	NR	E	NR	NR	NR	NR			
Carbon Steel High Strength Low Alloy (HSLA)	SAE 2613	Welded & Flash Controlled	Sub-critically annealed	HRB 90	-65° to 500°F -55° to 260°C	High pressure hydraulic	E	(10)	NR	(6)	NR	NR	NR	NR	NR	NR	NR	NR			
	SAE J2614	Welded & Drawn					E	NR	(6)	NR	NR	NR	NR	NR	NR	NR	NR	NR			
Alloy Steel 4130	ASTM A519	Seamless			-65° to 500°F -55° to 260°C	High pressure hydraulics	E	(4)	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR			
St 37.4 (Carbon Steel)	DIN 2391 Part 2 (Metric)	Seamless	Fully Annealed	HRB 72	-65° to 500°F -55° to 260°C	High pressure hydraulic, air, & some specialty chemicals	E	NR	NR	G	NR	NR	NR	NR	NR	NR	NR	E			
Stainless Steel 304 & 316	ASTM A213 ASTM A269	Seamless	Fully Annealed	HRB 90	-425° to 1200°F -255° to 650°C (3)	High pressure, high temperature, or generally corrosive media (1)	(6)	E	(6)	(6)	G	(6)	NR	(6)	E	NR	NR	NR			
	ASTM A249 ASTM A269	Welded & Drawn					(6)	E	(6)	(6)	E	(6)	NR	(6)	E	NR	NR	NR			
1.4571 1.4541 Stainless Steel	DIN 17458 Tab 8 (Metric)	Seamless	Fully Annealed	HRB 90	-425° to 1200°F -255° to 650°C (3)	High pressure, high temperature, or generally corrosive media (1)	(6)	E	NR	(6)	G	NR	NR	NR	E	NR	NR	E			
Copper	SAE J528 (ASTM B-75) (8)	Seamless	Soft Annealed Temper 0	60 Max. Rockwell 15T	-325° to 400°F -200° to 205°C	Low pressure, low temperature, water, oil & air	E	(6)	E	G	(6)	E	NR	G	(2)	NR	NR	E			
Aluminum 6061	ASTM-B210	Seamless	T6 Temper	HRB 56	-325° to 400°F -200° to 205°C	Low pressure, low temperature, water, oil, air & some specialty chemicals	NR	NR	NR	G	NR	NR	NR	E	(2)	NR	NR	(6)	NR		
			0 & T4 Temper	HRB 30			E	(5)	NR	NR	G	NR	NR	NR	E	(2)	NR	NR	(6)	NR	
Monel 400	ASTM-B165	Seamless	Fully Annealed	HRB 70	-400° to 800°F -240° to 425°C	Sour gas, marine & general chemical processing media	NR	(6)	NR	NR	(6)	NR	E	NR	(6)	E	NR	NR			
Nylon		Extruded	Flexible & Semi-Rigid		-60° to 200°F -50° to 95°C	Lube lines, chemical process controls & air	NR	NR	NR	NR	NR	NR	NR	G	(2)	G	(2)	G	(2)	E	G (2), (9)
Polyethylene	ASTM D-1248	Extruded	Instrument Grade		-80° to 150°F -60° to 65°C	Instrumentation lines	NR	NR	NR	NR	NR	NR	NR	G	(2)	G	(2)	G	(2)	E	G (2), (9)
PVC		Extruded	Instrument & Laboratory Grade		0° to 140°F -20° to 60°C	General purpose laboratory use	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	G		NR	
PTFE		Extruded & Cintered			-65° to 400°F -55° to 205°C	Very low pressure, high temperature, fuel, lube, chemical & air applications	NR	NR	NR	NR	NR	NR	NR	G	(2)	G	(2)	G	(2)	G	G (2), (9)

Table U7 — Tube and Fitting Material Compatibility

Ratings Key:

- NR Not Recommended
- F Fair
- G Good
- E Excellent

Fitting Materials Code:

- S Steel
- SS Stainless Steel
- B Brass
- M Monel

Notes:

- 1) For highly corrosive media or service environment, [contact the Tube Fittings Division](#).
- 2) Requires different assembly procedure. [Contact the Tube Fittings Division](#).
- 3) Low temperature limit for stainless steel Ferulok fittings is -20°F (-30°C).
- 4) For brazing only. Grade 4130 not recommended with Parflange process.
- 5) For use with Parflange process only. Not recommended with brazing.
- 6) Use depends on specific application. [Contact the Tube Fittings Division](#).
- 7) Applies to tube material.
- 8) Comparable specifications to SAE.
- 9) With metric version of tubing.
- 10) Not tested with Parflange. [Contact the Tube Fittings Division](#).



Determining Tube Size for Hydraulic Systems

Proper tube material, type and size for a given application and type of fitting is critical for efficient and trouble free operation of the fluid system. Selection of proper tubing involves choosing the right tube material, and determining the optimum tube size (O.D. and wall thickness).

Proper sizing of the tube for various parts of a hydraulic system results in an optimum combination of efficient and cost effective performance.

A tube that is too small causes high fluid velocity, which has many detrimental effects. In suction lines, it causes cavitation which starves and damages pumps. In pressure lines, it causes high friction losses and turbulence, both resulting in high pressure drops and heat generation. High heat accelerates wear in moving parts and rapid aging of seals and hoses, all resulting in reduced component life. High heat generation also means wasted energy, and hence, low efficiency.

Too large of a tube increases system cost. Thus, optimum tube sizing is very critical. The following is a simple procedure for sizing the tubes.

Step 1: Determine Required Flow Diameter

Use Tables U13 and U14 to determine recommended flow diameter for the required flow rate and type of line.

The table is based on the following recommended flow velocities:

- Pressure lines — 25 ft./sec. or 7.62 meters/sec.**
- Return lines — 10 ft./sec. or 3.05 meters/sec.**
- Suction lines — 4 ft./sec. or 1.22 meters/sec.**

If you desire to use different velocities than the above, use one of the following formulae to determine the required flow diameter.

$$\text{Tube I.D. (in.)} = 0.64 \sqrt{\frac{\text{Flow in GPM}}{\text{Velocity in ft./sec.}}}$$

OR

$$\text{Tube I.D. (mm)} = 4.61 \sqrt{\frac{\text{Flow in liters per minute}}{\text{Velocity in meters/sec.}}}$$

Step 2: Determine Tube O.D. and Wall Thickness

Using [Table U15](#) and [Table U16](#), determine the tube O.D. and wall thickness combination that satisfies the following two conditions:

- A. Has recommended design pressure equal to or higher than maximum operating pressure.
- B. Provides tube I.D. equal to or greater than required flow diameter determined earlier.

Design pressure values in [Tables U15](#) and [U16](#) are based on the severity of service rating "A" (design factor of 4) in [Table U10](#), and temperature derating factor of 1 in [Table U11](#).

If more severe operating conditions are involved, the values in [Table U15](#) and [Table U16](#) should be multiplied by appropriate derating factors from Tables U10 and U11 before determining the tube O.D. and wall thickness combination. [Contact the Tube Fittings Division](#) when in doubt.

Allowable design stress levels and formula used to arrive at the design pressure values are given in the following chart. Values in [Table U8](#) are for fully annealed tubing.

Material and Type	Allowable Design Stress for Design Factor of 4 at 72°F	Tube Specification
Steel C-1010	12,500 PSI	SAE J356, J524, J525
Steel C-1021	15,000 PSI	SAE J2435, J2467
Steel, High Strength Low Alloy (HSLA)	18,000 PSI	SAE J2613, J2614
Stainless Steel 304 & 316	18,800 PSI	ASTM A213, A249, A269
Alloy Steel C-4130	18,800 PSI	ASTM A519
Copper, K or Y	6,000 PSI	SAE J528, ASTM B75
Aluminum 6061-T6	10,500 PSI	ASTM B210
Monel, 400	17,500 PSI	ASTM B165

Table U8 — Design Stress Values

Design Pressure Formula (LAME'S)

$$P = S \left(\frac{D^2 - d^2}{D^2 + d^2} \right) \text{ where:}$$

D = Outside diameter of tube, in
d = Inside diameter of tube (D-2T), in
P = Recommended design pressure, psi
S = Allowable stress for design factor of 4, psi
T = Tube wall thickness, in.

Table U9 — Design Pressure Formula

For thin wall tubes (D/T ≥ 10) the following formula may be Used: **P = 2ST/D**

Severity of Service	Description	Design Factor	Derating Factor
A (Normal)	Moderate mechanical and hydraulic shocks.	4.00	1.00
B (Severe)	Severe hydraulic shocks and mechanical strain.	6.00	0.67
C (Hazardous)	Hazardous application with severe service conditions.	8.00	0.50

Table U10 — Severity of Service Design and Derating Factors

The design factor is generally applied to ultimate strength of material (or burst pressure of tubing) to provide a measure of safety against the unknowns in material and operating conditions. The derating factors listed here should be applied directly to the design pressure values in [Table U15](#) and [Table U16](#) to arrive at maximum recommended working pressures (i.e., multiply values in [Table U15](#) and [Table U16](#) by these derating factors).

Besides severity of service, high operating temperature also reduces allowable working pressure of the tubing. Temperature derating factors for various tube materials are given in [Table U11](#). Where applicable, derating factors for severity of service and temperature should be applied to the design pressure values in [Table U15](#) and [Table U16](#) to arrive at the maximum recommended working pressure.

Example:

Combined derating factor for 316SS tubing for B (severe) service and 500° F. operation is $.67 \times .9 = .603$

Tube Selection Example:

Maximum Operating Temperature (degrees F)	Steel C-1010 and C-4130	Stainless Steel		Copper	Aluminum 6061-T6	Monel Type 400
		304	316			
100	1.00	1.00	1.00	1.00	1.00	1.00
150	1.00	0.91	1.00	0.85	1.00	0.97
200	1.00	0.84	1.00	0.80	1.00	0.94
250	1.00	0.79	1.00	0.80	0.94	0.91
300	1.00	0.75	1.00	0.78	0.80	0.88
350	0.99	0.72	0.99	0.67	0.60	0.86
400	0.98	0.69	0.97	0.50	0.43	0.85
500	0.96	0.65	0.90			0.84
600		0.61	0.85			0.84
700		0.59	0.82			0.84
800		0.57	0.80			0.83
900		0.54	0.78			
1000		0.52	0.77			
1100		0.47	0.62			
1200		0.32	0.37			

Table U11 — Temperature Derating Factors* for Tubes

* The derating factors are based on allowable design stress values at various temperatures per ASME B31.1 code for pressure piping (1986).

To select tube material and tube sizes for pressure, return and suction lines for a hydraulic power unit with the following operating parameters known:

- Type of fluid: Petroleum base hydraulic fluid
- Operating temperature range: -20°F to +140°F.
- Maximum operating pressure: 3500 psi
- Maximum flow rate through each line: 10 GPM
- Severity of service: A (normal)

1. **Selecting Tube Material:** Table U7 indicates that carbon steel, C-1010, tubing would meet the media, operating temperature range, and maximum operating pressure (high) requirements.
2. **Sizing the Tube:** From Table U13, the recommended flow diameters for various lines for 10 GPM flow rate are: 0.405 for pressure line, 0.639 for return line, and 1.012 for suction line.

Now, using [Table U15](#) and [Table U16](#), we need to find tubes with inside diameters (I.D.) equal to or larger than the above flow diameters, and wall thicknesses appropriate for design pressures of 3500 psi minimum for the pressure line and about 500 psi for return and suction lines. Since derating factors for Severity of Service ([Table U10](#)) and Max. Operating Temperature ([Table U11](#)) are both 1, design pressure values in [Table U15](#) and [Table U16](#) do not need to be reduced.

Matching tube I.D.s and design pressures in [Table U15](#) and [Table U16](#) for above conditions, we find:

- A) For the pressure line, we would choose 5/8" O.D. x .083" wall tubing. The .095" and .109" wall tubes would also be satisfactory if .083" wall is not readily available.
- B) For the return line, either 3/4" x .035" or 3/4" x .049" would meet the requirements. If Ferulok fittings are being used, we will need to go to 3/4" x .065" because .065" is the smallest wall thickness recommended for 3/4" O.D. tubing used with Ferulok fittings in [Table U14](#). This reduces the flow diameter about 3% below the recommended value, but is still in the acceptable range. The alternative is to go to 7/8" O.D. x .072" wall tubing, which is way too large.

Tube Material			Steel St. Steel Copper Aluminum	Steel St. Steel Monel	Steel Alloy Steel St. Steel Copper Monel	Copper Aluminum Plastics	Steel St. Steel
Size			SAE 37° Flare Triple-Lok	SAE Flareless Ferulok	SAE O-ring Face Seal Seal-Lok ¹⁾	Intru-Lok	Metric Flareless
O.D. (in.)	O.D. (mm)	Dash Number					
1/8	4	-2	.010 - .035	.010 - .035	—	.012 - .028	0.5 - 1
3/16	6	-3	.010 - .035	.020 - .049	—	.012 - .035	1 - 2
1/4	8	-4	.020 - .065	.028 - .065	.020 - .083	.020 - .049	1 - 2.5
5/16	10	-5	.020 - .065	.028 - .065	.020 - .095	.020 - .065	1 - 3
3/8	12	-6	.020 - .065	.035 - .095	.020 - .109	.028 - .065	1.5 - 3.5
1/2	14	-8	.028 - .083	.049 - .120	.028 - .148	.035 - .083	1.5 - 4
5/8	15	-10	.035 - .095	.058 - .120	.035 - .134	.035 - .083	1.5 - 4
3/4	16	-12	.035 - .109	.065 - .120	.035 - .148	.035 - .095	2 - 4
7/8	18	-14	.035 - .109	.072 - .120	—	.049 - .095	2 - 4
1	20	-16	.035 - .120	.083 - .148	.035 - .188	.049 - .120	2.5 - 4
1 1/4	22	-20	.049 - .120	.095 - .188	.049 - .220		2.5 - 4
1 1/2	25	-24	.049 - .120	.095 - .220	.049 - .250		2.5 - 4.5
2	28	-32	.058 - .134	.095 - .220	.065 - .220		2.5 - 4.5
	30						2.5 - 5
	35						3 - 5
	38						3 - 6
	42						3.5 - 7

1) Brazing to attach sleeve can be used for all wall thicknesses. For flanging tool availability, see page S29.

Table U12 — Recommended “Min./Max” Tube Wall Thickness for Common Fittings

- C) For the suction line, we can use any one of the following tubes: 1-1/4" O.D. x .049" to .083" wall tube for Triple-Lok or Seal-Lok fittings and 1-1/4" O.D. x .095" wall tube for Ferulok fittings.

One final consideration in choosing the right wall thickness for tubing is bending. If bending without the use of a mandrel is desired, then wall thickness of less than 7% of tube O.D. should not be used.

Recommended Flow Diameters – In Inches

Maximum Flow Rate GPM	Recommended Flow Diameter in Inches		
	Pressure Lines	Return Lines	Suction Lines
0.25	0.064	0.101	0.160
0.50	0.091	0.143	0.226
0.75	0.111	0.175	0.277
1.00	0.128	0.202	0.320
1.25	0.143	0.226	0.358
1.50	0.157	0.247	0.392
1.75	0.169	0.267	0.423
2.00	0.181	0.286	0.453
2.50	0.202	0.319	0.506
3.00	0.222	0.350	0.554
3.50	0.239	0.378	0.599
4.00	0.256	0.404	0.640
4.50	0.272	0.429	0.679
5.00	0.286	0.452	0.716
5.50	0.300	0.474	0.750
6.00	0.314	0.495	0.784
6.50	0.326	0.515	0.816
7.00	0.339	0.534	0.847
7.50	0.351	0.553	0.876
8.00	0.362	0.571	0.905
8.50	0.373	0.589	0.933
9.00	0.384	0.606	0.960
9.50	0.395	0.623	0.986
10.00	0.405	0.639	1.012
11.00	0.425	0.670	1.061
12.00	0.443	0.700	1.109
13.00	0.462	0.728	1.154
14.00	0.479	0.756	1.197
15.00	0.496	0.782	1.239
16.00	0.512	0.808	1.280
17.00	0.528	0.833	1.319
18.00	0.543	0.857	1.358
19.00	0.558	0.880	1.395
20.00	0.572	0.903	1.431
22.00	0.600	0.947	1.501
24.00	0.627	0.990	1.568
26.00	0.653	1.030	1.632
28.00	0.677	1.069	1.693
30.00	0.701	1.106	1.753
32.00	0.724	1.143	1.810
34.00	0.746	1.178	1.866
36.00	0.768	1.212	1.920
38.00	0.789	1.245	1.973
40.00	0.810	1.278	2.024
42.00	0.830	1.309	2.074
44.00	0.849	1.340	2.123
46.00	0.868	1.370	2.170
48.00	0.887	1.399	2.217
50.00	0.905	1.428	2.263
55.00	0.949	1.498	2.373
60.00	0.991	1.565	2.479

Maximum Flow Rate GPM	Recommended Flow Diameter in Inches		
	Pressure Lines	Return Lines	Suction Lines
65.00	1.032	1.629	2.580
70.00	1.071	1.690	2.677
75.00	1.109	1.749	2.771
80.00	1.145	1.807	2.862
85.00	1.180	1.862	2.950
90.00	1.214	1.916	3.036
95.00	1.248	1.969	3.119
100.00	1.280	2.020	3.200
110.00	1.342	2.119	3.356
120.00	1.402	2.213	3.505
130.00	1.459	2.303	3.649
140.00	1.515	2.390	3.786
150.00	1.568	2.474	3.919
160.00	1.619	2.555	4.048
170.00	1.669	2.634	4.172
180.00	1.717	2.710	4.293
190.00	1.764	2.784	4.411
200.00	1.810	2.857	4.525

Table U13 — Recommended Flow Diameters, in Inches

Recommended Flow Diameters – In Millimeters

Maximum Flow Rate LPM*	Recommended Flow Diameter in Millimeters		
	Pressure Lines	Return Lines	Suction Lines
1	1.670	2.640	4.180
2	2.362	3.734	5.911
3	2.893	4.573	7.240
4	3.340	5.280	8.360
5	3.734	5.903	9.347
6	4.091	6.467	10.239
7	4.418	6.985	11.059
8	4.723	7.467	11.823
9	5.010	7.920	12.540
10	5.281	8.348	13.218
12	5.785	9.145	14.480
14	6.249	9.878	15.640
16	6.680	10.560	16.720
18	7.085	11.201	17.734
20	7.468	11.806	18.694
22	7.833	12.383	19.606
24	8.181	12.933	20.478
26	8.515	13.461	21.314
28	8.837	13.970	22.118
30	9.147	14.460	22.895
32	9.447	14.934	23.646
34	9.738	15.394	24.373
36	10.020	15.840	25.080
38	10.295	16.274	25.767
40	10.562	16.697	26.437
45	11.203	17.710	28.040
50	11.809	18.668	29.557
55	12.385	19.579	31.000
60	12.936	20.449	32.378
65	13.464	21.284	33.700
70	13.972	22.088	34.972
75	14.463	22.863	36.200
80	14.937	23.613	37.387
85	15.397	24.340	38.538
90	15.843	25.045	39.655
95	16.277	25.732	40.742
100	16.700	26.400	41.800
110	17.515	27.689	43.840
120	18.294	28.920	45.790
130	19.041	30.101	47.659
140	19.760	31.237	49.458
150	20.453	32.333	51.194
160	21.124	33.394	52.873
170	21.774	34.421	54.501
180	22.405	35.419	56.081
190	23.019	36.390	57.617
200	23.617	37.335	59.114
220	24.770	39.158	61.999
240	25.872	40.899	64.756
260	26.928	42.569	67.400
280	27.944	44.176	69.945

Maximum Flow Rate LPM*	Recommended Flow Diameter in Millimeters		
	Pressure Lines	Return Lines	Suction Lines
300	28.925	45.726	72.400
320	29.874	47.226	74.774
340	30.793	48.679	77.075
360	31.686	50.090	79.310
380	32.554	51.463	81.483
400	33.400	52.800	83.600
450	35.426	56.003	88.671
500	37.342	59.032	93.468
550	39.165	61.913	98.030
600	40.906	64.667	102.389
650	42.577	67.307	106.570
700	44.184	69.848	110.592
750	45.735	72.299	114.474
800	47.235	74.670	118.228

Table U14 — Recommended Flow Diameters, in Millimeters

* LPM = Liters Per Minute

Inch Tube Pressure Ratings

Inch Tubes*						
Tube O.D. (in.)	Wall Thick. (in.)	Tube I.D. (in.)	Design Pressure (4:1 Design Factor), PSI			
			Steel 1010	Steel 1021	Stainless Steel 304 & 316, 4130, HSLA	Copper
0.125	0.010	0.105	2150	2600	3250	1050
0.125	0.020	0.085	4600	5500	6900	2200
0.125	0.028	0.069	6650	8000	10000	3200
0.125	0.035	0.055	8450	10150	12700	4050
0.188	0.010	0.168	1400	1700	2100	650
0.188	0.020	0.148	2950	3550	4450	1400
0.188	0.028	0.132	4250	5100	6400	2050
0.188	0.035	0.118	5450	6550	8200	2600
0.188	0.049	0.090	7850	9400	11800	3750
0.250	0.020	0.210	2150	2600	3250	1050
0.250	0.028	0.194	3100	3700	4650	1500
0.250	0.035	0.180	3950	4750	5950	1900
0.250	0.049	0.152	5750	6900	8650	2750
0.250	0.058	0.134	6900	8300	10400	3300
0.250	0.065	0.120	7800	9350	11750	3750
0.250	0.083	0.084	9950	11950	15000	4800
0.313	0.020	0.273	1700	2050	2550	800
0.313	0.028	0.257	2450	2950	3650	1150
0.313	0.035	0.243	3100	3700	4650	1500
0.313	0.049	0.215	4500	5400	6750	2150
0.313	0.058	0.197	5400	6500	8150	2600
0.313	0.065	0.183	6150	7400	9250	2950
0.313	0.072	0.169	6850	8200	10350	3300
0.313	0.083	0.147	8000	9600	12050	3850
0.313	0.095	0.123	9150	11000	13800	4400
0.375	0.020	0.335	1400	1700	2100	650
0.375	0.028	0.319	2000	2400	3000	950
0.375	0.035	0.305	2550	3050	3850	1200
0.375	0.049	0.277	3650	4400	5550	1750
0.375	0.058	0.259	4450	5350	6650	2100
0.375	0.065	0.245	5000	6000	7550	2400
0.375	0.072	0.231	5600	6700	8450	2700
0.375	0.083	0.209	6550	7900	9900	3150
0.375	0.095	0.185	7600	9100	11450	3650
0.375	0.109	0.157	8750	10500	13200	4200
0.500	0.028	0.444	1500	1800	2200	700
0.500	0.035	0.430	1850	2200	2800	900
0.500	0.049	0.402	2700	3250	4050	1300
0.500	0.058	0.384	3250	3900	4850	1550
0.500	0.065	0.370	3650	4400	5500	1750
0.500	0.072	0.356	4100	4900	6150	1950
0.500	0.083	0.334	4800	5750	7200	2300
0.500	0.095	0.310	5550	6650	8350	2650
0.500	0.109	0.282	6450	7750	9750	3100
0.500	0.120	0.260	7200	8650	10800	3450
0.500	0.134	0.232	8050	9650	12150	3850
0.500	0.148	0.204	8950	10750	13450	4300
0.500	0.188	0.124	11050	13250	16600	5300

Inch Tubes*						
Tube O.D. (in.)	Wall Thick. (in.)	Tube I.D. (in.)	Design Pressure (4:1 Design Factor), PSI			
			Steel 1010	Steel 1021	Stainless Steel 304 & 316, 4130, HSLA	Copper
0.625	0.028	0.569	1150	1400	1750	550
0.625	0.035	0.555	1500	1800	2200	700
0.625	0.049	0.527	2100	2500	3200	1000
0.625	0.058	0.509	2550	3050	3800	1200
0.625	0.065	0.495	2850	3400	4300	1350
0.625	0.072	0.481	3200	3850	4800	1550
0.625	0.083	0.459	3750	4500	5650	1800
0.625	0.095	0.435	4350	5200	6550	2100
0.625	0.109	0.407	5050	6050	7600	2450
0.625	0.120	0.385	5600	6700	8450	2700
0.625	0.134	0.357	6350	7600	9550	3050
0.750	0.035	0.680	1200	1450	1850	600
0.750	0.049	0.652	1750	2100	2600	850
0.750	0.058	0.634	2100	2500	3150	1000
0.750	0.065	0.620	2350	2800	3550	1150
0.750	0.072	0.606	2650	3200	3950	1250
0.750	0.083	0.584	3050	3650	4600	1450
0.750	0.095	0.560	3550	4250	5350	1700
0.750	0.109	0.532	4150	5000	6200	2000
0.750	0.120	0.510	4600	5500	6900	2200
0.750	0.134	0.482	5200	6250	7800	2500
0.750	0.148	0.454	5800	7000	8700	2800
0.750	0.188	0.374	7500	9000	11300	3600
0.875	0.035	0.805	1050	1250	1550	500
0.875	0.049	0.777	1500	1800	2200	700
0.875	0.058	0.759	1750	2100	2650	850
0.875	0.065	0.745	2000	2400	3000	950
0.875	0.072	0.731	2200	2650	3350	1050
0.875	0.083	0.709	2600	3100	3900	1250
0.875	0.095	0.685	3000	3600	4500	1450
0.875	0.109	0.657	3500	4200	5250	1650
0.875	0.120	0.635	3900	4700	5850	1850
0.875	0.134	0.607	4400	5300	6600	2100
0.875	0.148	0.579	4900	5900	7350	2350
1.000	0.035	0.930	900	1100	1350	450
1.000	0.049	0.902	1300	1550	1950	600
1.000	0.058	0.884	1550	1850	2300	750
1.000	0.065	0.870	1750	2100	2600	850
1.000	0.072	0.856	1950	2350	2900	950
1.000	0.083	0.834	2250	2700	3400	1100
1.000	0.095	0.810	2600	3100	3900	1250
1.000	0.109	0.782	3000	3600	4550	1450
1.000	0.120	0.760	3350	4000	5050	1600
1.000	0.134	0.732	3800	4550	5700	1800
1.000	0.148	0.704	4200	5050	6350	2000
1.000	0.156	0.688	4450	5350	6700	2150
1.000	0.188	0.624	5500	6600	8250	2650
1.000	0.220	0.560	6550	7850	9800	3150

* See Table U8 for tube specifications.

Table U15 — Inch Tube Pressure Ratings



Inch Tube Pressure Ratings (cont'd.)

Inch Tubes*						
Tube O.D. (in.)	Wall Thick. (in.)	Tube I.D. (in.)	Design Pressure (4:1 Design Factor), PSI			
			Steel 1010	Steel 1021	Stainless Steel 304 & 316, 4130, HSLA	Copper
1.250	0.049	1.152	1000	1200	1550	500
1.250	0.058	1.134	1200	1450	1850	600
1.250	0.065	1.120	1350	1600	2050	650
1.250	0.072	1.106	1500	1800	2300	750
1.250	0.083	1.084	1750	2100	2650	850
1.250	0.095	1.060	2050	2450	3050	1000
1.250	0.109	1.032	2350	2800	3550	1150
1.250	0.120	1.010	2650	3200	3950	1250
1.250	0.134	0.982	2950	3550	4450	1400
1.250	0.148	0.954	3300	3950	4950	1600
1.250	0.156	0.938	3500	4200	5250	1700
1.250	0.188	0.874	4300	5150	6450	2050
1.250	0.22	0.810	5100	6100	7700	2450
1.500	0.065	1.370	1150	1400	1700	550
1.500	0.072	1.356	1250	1500	1900	600
1.500	0.083	1.334	1450	1750	2200	700
1.500	0.095	1.310	1700	2050	2550	800
1.500	0.109	1.282	1950	2350	2950	950
1.500	0.120	1.260	2150	2600	3250	1050
1.500	0.134	1.232	2450	2950	3650	1150
1.500	0.148	1.204	2700	3250	4050	1300
1.500	0.156	1.188	2850	3400	4300	1350
1.500	0.188	1.124	3500	4200	5300	1700
1.500	0.220	1.060	4150	5000	6300	2000
1.500	0.250	1.000	4800	5750	7250	2300
2.000	0.065	1.870	850	1000	1250	400
2.000	0.072	1.856	950	1150	1400	450
2.000	0.083	1.834	1100	1300	1600	500
2.000	0.095	1.810	1250	1500	1850	600
2.000	0.109	1.782	1450	1750	2150	700
2.000	0.120	1.760	1600	1900	2400	750
2.000	0.134	1.732	1800	2150	2700	850
2.000	0.148	1.704	2000	2400	3000	950
2.000	0.156	1.688	2100	2500	3150	1000
2.000	0.188	1.624	2550	3050	3850	1250
2.000	0.220	1.560	3050	3650	4600	1450
2.000	0.250	1.500	3500	4200	5250	1700
2.000	0.281	1.438	4000	4800	6000	1900

* See [Table U8](#) for tube specifications.

Table U15 — Inch Tube Pressure Ratings, cont'd.

Metric Tube Pressure Ratings

Metric Tubes				
Tube O.D. (mm)	Wall Thick. (mm)	Tube I.D. (mm)	Design Pressure (Bar)	
			Steel Low-Carbon St. 37-4	Stainless Steel 1.4571
4	0.5	3.0	313	256
4	0.75	2.5	409	366
4	1.0	2.0	522	465
5	0.8	3.5	376	301
5	1.0	3.0	432	386
6	0.75	4.5	333	256
6	1.0	4.0	389	330
6	1.5	3.0	549	465
6	2.0	2.0	692	585
6	2.25	1.5	757	639
8	1.0	6.0	333	256
8	1.5	5.0	431	366
8	2.0	4.0	549	465
8	2.5	3.0	658	556
10	1.0	8.0	282	209
10	1.5	7.0	373	301
10	2.0	6.0	478	386
10	2.5	5.0	576	465
10	3.0	4.0	666	539
12	1.0	10.0	235	177
12	1.5	9.0	353	256
12	2.0	8.0	409	330
12	2.5	7.0	495	400
12	3.0	6.0	576	465
12	3.5	5.0	651	527
14	1.0	12.0	201	153
14	1.5	11.0	302	223
14	2.0	10.0	403	289
14	2.5	9.0	434	351
14	3.0	8.0	507	410
14	3.5	7.0	676	465
14	4.0	6.0	641	518
15	1.0	13.0	188	143
15	1.5	12.0	282	209
15	2.0	11.0	376	271
15	2.5	10.0	409	330
15	3.0	9.0	478	386
16	1.0	14.0	176	135
16	1.5	13.0	264	197
16	2.0	12.0	353	256
16	2.5	11.0	386	312
16	3.0	10.0	452	366
18	1.0	16.0	157	121
18	1.5	15.0	235	177
18	2.0	14.0	313	230
18	2.5	13.0	392	281
18	3.0	12.0	409	330
20	1.5	17.0	212	160
20	2.0	16.0	282	209
20	2.5	15.0	353	256
20	3.0	14.0	373	301
20	3.5	13.0	426	345
20	4.0	12.0	478	386
22	1.0	20.0	128	100
22	1.5	19.0	192	146
22	2.0	18.0	266	192
22	2.5	17.0	320	235
22	3.0	16.0	385	277
25	2.0	21.0	226	170
25	2.5	20.0	282	209
25	3.0	19.0	338	247

Metric Tubes				
Tube O.D. (mm)	Wall Thick. (mm)	Tube I.D. (mm)	Design Pressure (Bar)	
			Steel Low-Carbon St. 37-4	Stainless Steel 1.4571
25	4.0	17.0	394	319
25	4.5	16.0	437	353
25	5.0	15.0	478	386
28	1.5	25.0	151	117
28	2.0	24.0	201	153
28	2.5	23.0	252	188
28	3.0	22.0	302	223
28	4.0	20.0	403	289
28	5.0	18.0	434	351
30	2.0	26.0	188	143
30	2.5	25.0	235	177
30	3.0	24.0	282	209
30	4.0	22.0	376	271
30	5.0	20.0	409	330
35	2.0	31.0	161	124
35	2.5	30.0	201	153
35	3.0	29.0	242	181
35	4.0	27.0	322	236
35	5.0	25.0	403	289
35	6.0	23.0	419	339
38	2.5	33.0	186	142
38	3.0	32.0	223	168
38	4.0	30.0	297	219
38	5.0	28.0	371	268
38	6.0	26.0	390	315
38	7.0	24.0	446	360
42	2.0	38.0	134	104
42	3.0	36.0	201	153
42	4.0	34.0	269	200
50	6.0	38.0	338	247
50	9.0	32.0	437	353
65	8.0	49.0	347	253
80	10.0	60.0	353	256

Table U16 — Metric Tube Pressure Ratings



Tube Fittings Pressure Drop

In hydraulic systems, pressure drop represents loss of energy and therefore should be kept to a minimum. Pressure loss in straight tubing and hose is mainly caused by the frictional resistance of the walls, while in fittings it is mainly caused by changes in the magnitude or direction of the fluid velocity. Mathematical analysis of pressure drop, even though possible, may not be exact because of the interrelationship of factors such as fluid density, velocity, flow area and frictional coefficients.

The following pressure drop charts were derived from actual test data and may be used as a guide for determining pressure

drops at various flow rates through fittings for fluid indicated. To determine pressure drop for a given flow, trace a vertical line up from the flow axis to the desired size line then trace a horizontal line from this intersection over to the pressure drop axis.

Example: A size 8 CTX, with oil, similar to the test fluid, flowing through it at 4 gallons per minute, would cause a pressure drop of approximately 2.3 psi. Conversions will have to be made for fluids which are not similar to test fluid.

The Tube Fittings part numbers are listed below the Pressure Drop Chart to which they apply.

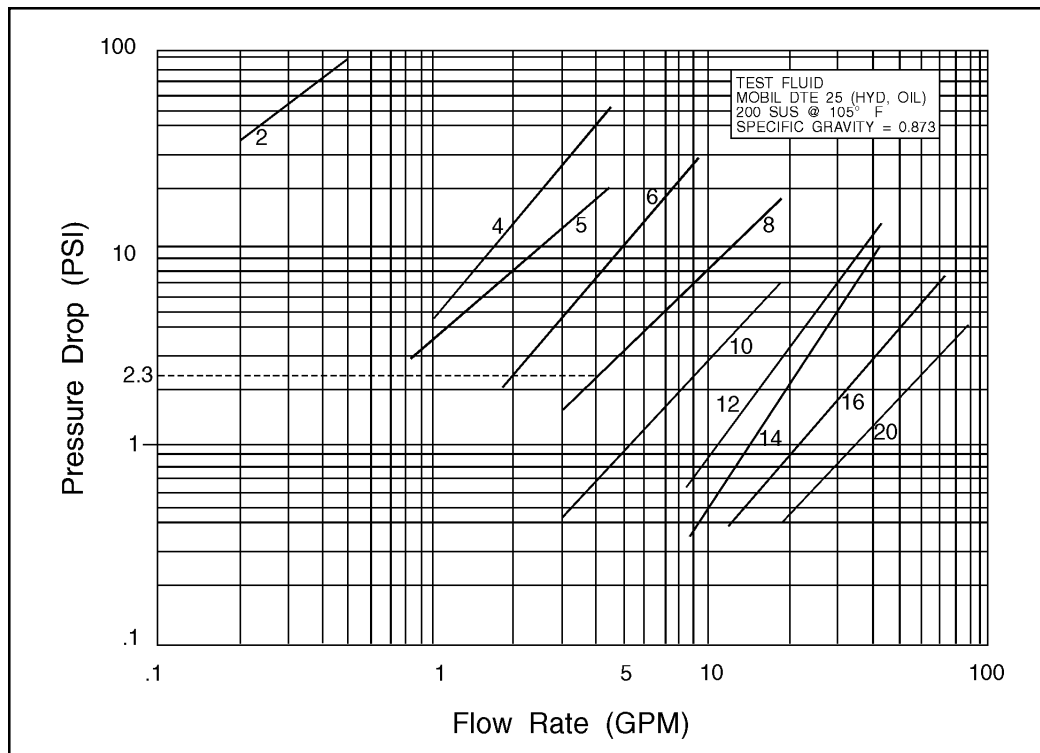


Fig. U2 — Pressure Drop Chart for 90° Fittings or Branch Path Through a Tee or Cross Fitting (Triple-Lok)

Pressure Drops for Other Fitting:

*These pressure drop curves were established with Triple-Lok fittings. The pressure drop values can be adjusted for other fittings of the same size by multiplying the value from the chart by the ratio of Triple-Lok flow diameter to that of the other fitting, raised to the 4th power.


Example: Find pressure drop for 6C5L at 5 gallons per minute flow rate:
 From the chart, the pressure drop for 6C5X is 10 psi.
 Also, the ratio of 6C5X to 6C5L flow diameters is 0.297/0.264, or 1.125.
 Therefore, the pressure drop for Seal-Lok = 10 x (1.125)⁴ = 16 psi.


Pressure Drops for Other Fluids:

Pressure drop through a fitting is mainly caused by change in direction and velocity of the fluid. Therefore, it is directly proportional to the specific gravity of the fluid. The drop due to friction, which is dependent on the viscosity of the fluid, is so small in this case that it can be ignored. Thus, the pressure drop with a different fluid can be calculated by multiplying the value from the graph above by the ratio of specific gravity of the two fluids, or:

$$\text{New Drop} = \text{Value from the graph} \times \frac{\text{Specific Gravity of New Fluid}}{\text{Specific Gravity of Test Fluid (0.873)}}$$

Examples:

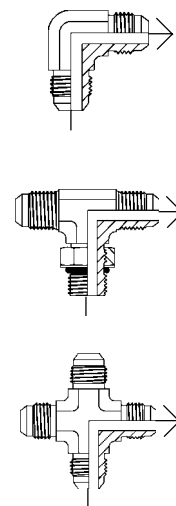

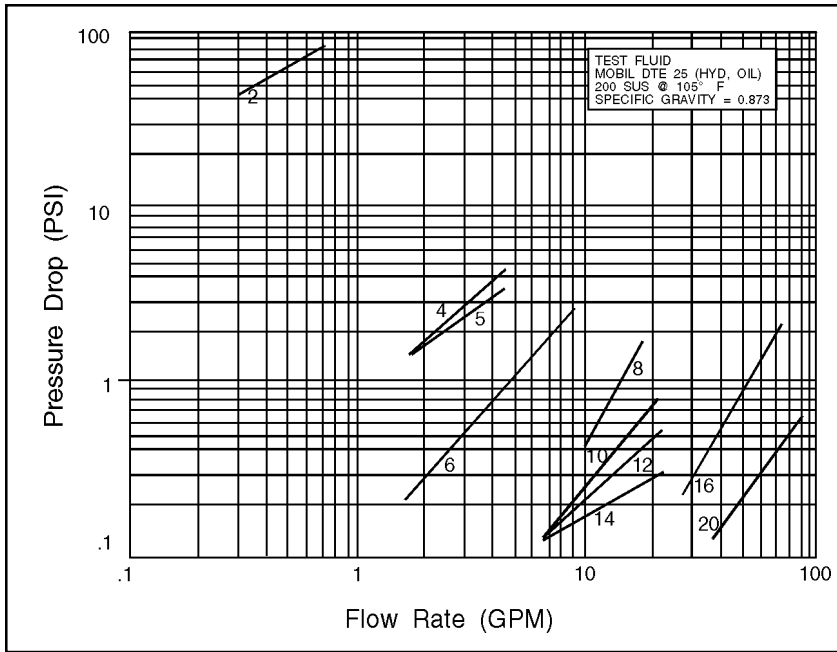

Examples:


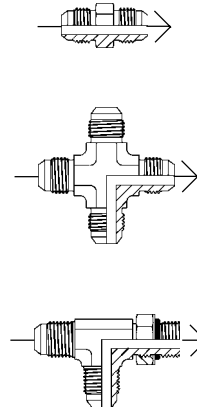


Fig. U3 — Pressure Drop Chart for Straight Fittings and Run Legs of Tees and Crosses (Triple-Lok)

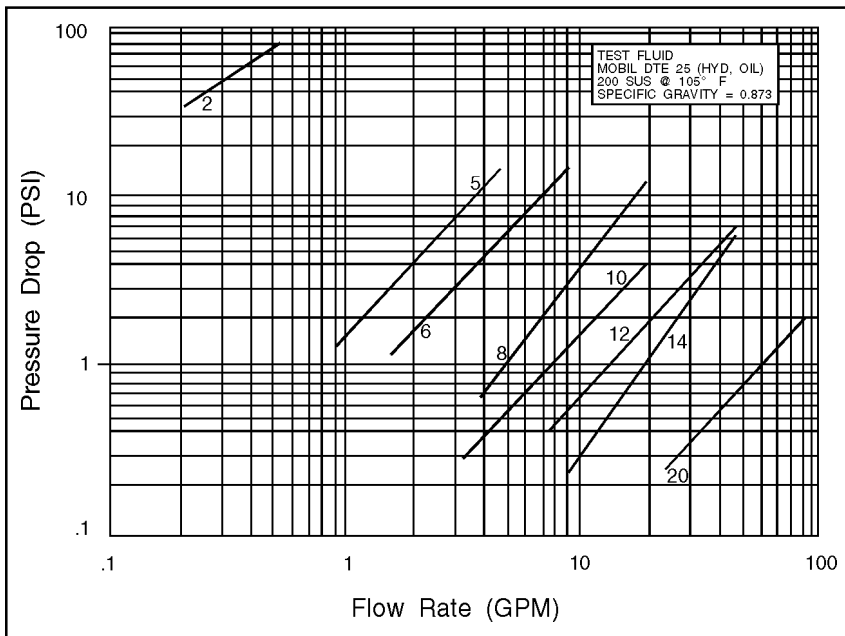

Example:




Fig. U4 — Pressure Drop Chart for 45° Elbow Fittings (Triple-Lok)

Fitting and Adapter Pressure Ratings

Pressure Ratings

Pressure ratings shown on the product pages of this catalog are for dynamic systems. A vast majority of systems where our fittings are used fall in this category. However, there are applications, such as hydraulic jacks, where the system pressure is essentially static once it is pressurized. For this type of an application the fittings can be used at higher pressures.

The dynamic and static systems can be defined as follows:

Dynamic: A system in which the operating pressure fluctuates, in accordance with load, up to a maximum pressure limited by the relief valve. In addition, the system may also experience shocks, vibration and temperature excursions. Example: A backhoe.

Static: A system, once pressurized, is essentially free of pressure fluctuations, shock, vibration and temperature excursions, with such pressurizations not exceeding 30,000 in the life of the system. Example: A hydraulic jack.

The dynamic pressure ratings are based on a minimum design factor of 4. In other words, the fitting is capable of holding a pressure equal to 4 times the rated pressure before leakage or failure. For static applications, the design factor can be 3. Hence, the static rating can be determined by multiplying the dynamic rating by 1.33.


Static pressure rating = 1.33 x Dynamic pressure rating

Example: Static pressure rating for a fitting rated at 6000 psi =
 $1.33 \times 6000 = 8000$ psi

Higher (dynamic) Ratings

Some Triple-Lok parts are capable of performing at higher pressures than those shown on the product pages. For information on higher ratings, [contact Tube Fittings Division](#).

ISO 6149-1 — Metric Straight Thread O-Ring Port (SAE 2244-1/DIN 3852, Part 3) Metric ISO 261, “M” Thread

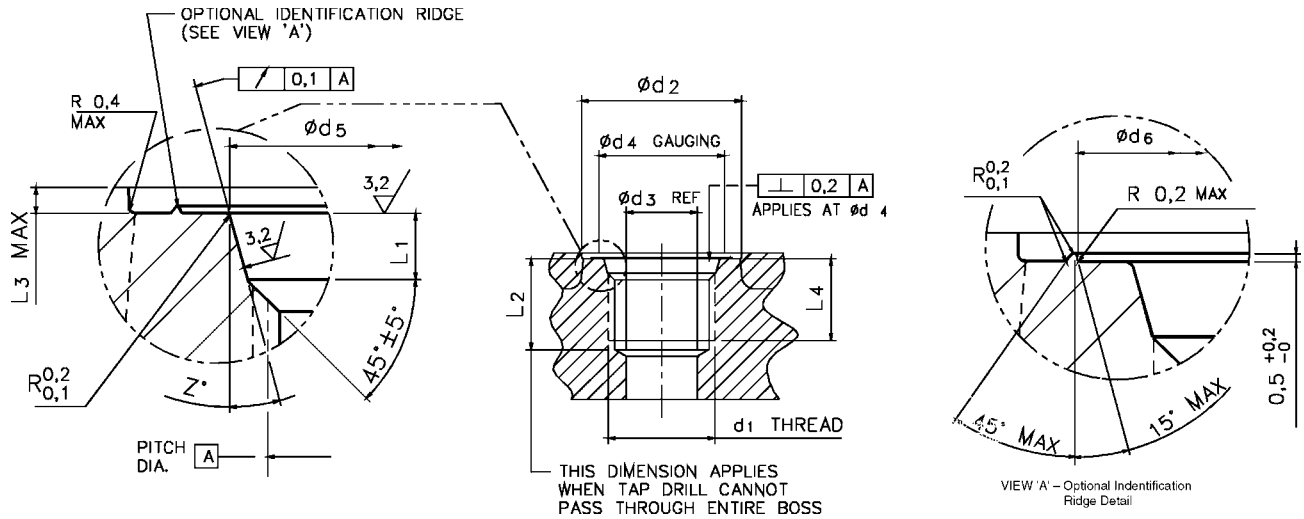

Thread Size d1 ¹⁾	Large d2 ²⁾ min	Small d2 ³⁾ min	d3 ⁴⁾ ref.	d4	d5 +0.1 0	d6 +0.5 0	L1 +0.4 0	L2 ⁵⁾ min	L3 max	L4 min full thread	Z° ±1°	Parker O-ring Size ⁸⁾
M8 X 1	17	14	3	12.5	9.1	14	1.6	11.5	1	10	12°	M8 ISO O-ring
M10 X 1	20	16	4.5	14.5	11.1	16	1.6	11.5	1	10	12°	M10 ISO O-ring
M12 X 1.5	23	19	6	17.5	13.8	19	2.4	14	1.5	11.5	15°	M12 ISO O-ring
M14 X 1.5 ⁶⁾	25	21	7.5	19.5	15.8	21	2.4	14	1.5	11.5	15°	M14 ISO O-ring
M16 X 1.5	28	24	9	22.5	17.8	24	2.4	15.5	1.5	13	15°	M16 ISO O-ring
M18 X 1.5	30	26	11	24.5	19.8	26	2.4	17	2	14.5	15°	M18 ISO O-ring
M22 X 1.5	34	29	14	27.5	23.8	29	2.4	18	2	15.5	15°	M22 ISO O-ring
M27 X 2	40	34	18	32.5	29.4	34	3.1	22	2	19	15°	M27 ISO O-ring
M30 X 2	44	38	18	36.5	32.4	38	3.1	22	2	19	15°	M30 ISO O-ring
M33 X 2	49	43	23	41.5	35.4	43	3.1	22	2.5	19	15°	M33 ISO O-ring
M42 X 2	60	52	30	50.5	44.4	52	3.1	22.5	2.5	19.5	15°	M42 ISO O-ring
M48 X 2	66	57	36	55.5	50.4	57	3.1	25	2.5	22	15°	M48 ISO O-ring
M60 X 2	76	67	44	65.5	62.4	67	3.1	27.5	2.5	24.5	15°	M60 ISO O-ring

FOR CARTRIDGE VALVE CAVITIES ONLY (SEE ISO 7789)

M20X1.5 ⁷⁾	32	27	—	25.5	21.8	27	2.4	—	2	14.5	15°	M20 ISO O-ring
-----------------------	----	----	---	------	------	----	-----	---	---	------	-----	----------------

Table U17— Port Detail — ISO 6149-1


- 1) Per ISO 261 tolerance class 6H. Tap drill per ISO 2306 class 6H.
- 2) Spotface diameter with the optional identification ridge.
- 3) Spotface diameter without identification ridge. Port to be identified by marking “metric” next to it or “ISO 6149-1 Metric” on component name plate.
- 4) Reference only. Connecting hole application may require a different size.
- 5) Tap drill depths given require use of a bottoming tap to produce the specified full thread lengths.
Where standard taps are used, increase tap drill depths accordingly.
- 6) Preferred for diagnostic port applications.
- 7) For cartridge valve cavity applications only.
- 8) 90 durometer nitrile is standard for hydraulic applications.

NOTE: For port tapping tools, see [pages S40 and S41](#). See [page T8](#) for assembly torques.

SAE J1926-1 — SAE Straight Thread O-ring Port (ISO 11926-1)

(Conforms to MS16142. Does NOT conform to MS33649⁽⁸⁾.)

UN/UNF Threads

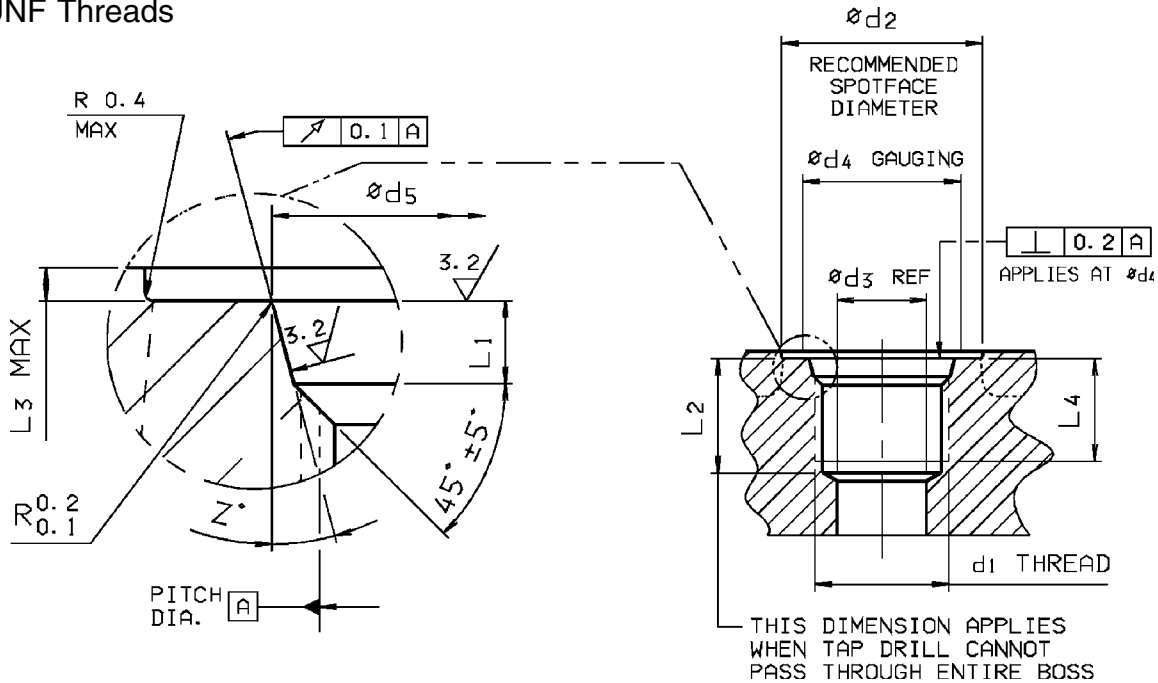

Nominal Tube OD ¹⁾			Thread Size ANSI B1.1 (ISO 263) (in)	d2 dia. ³⁾ (mm)	d3 dia. min. (mm)	d4 dia. min. (mm)	d5 dia. ⁴⁾ +0.13 -0.00 (mm)	L1 +0.4 -0.0 (mm)	L2 ⁵⁾ min. (mm)	L3 ^{3), 6)} max. (mm)	L4 Full Thread min. (mm)	Z ±1° deg	Parker O-ring Size ⁷⁾
Nom ²⁾ SAE Dash Size	Inch (in)	Metric (mm)											
-2	1/8	—	5/16-24 UNF-2B	17	1.6	11	9.1	1.9	12.0	1.6	10.0	12°	3-902
-3	3/16	4	3/8-24 UNF-2B	19	3.2	13	10.7	1.9	12.0	1.6	10.0	12°	3-903
-4	1/4	6	7/16-20 UNF-2B	21	4.4	15	12.4	2.4	14.0	1.6	11.5	12°	3-904
-5	5/16	8	1/2-20 UNF-2B	23	6.0	16	14.0	2.4	14.0	1.6	11.5	12°	3-905
-6	3/8	10	9/16-18 UNF-2B	25	7.5	18	15.6	2.5	15.5	1.6	12.7	12°	3-906
-8	1/2	12	3/4-16 UNF-2B	30	10.0	22	20.6	2.5	17.5	2.4	14.3	15°	3-908
-10	5/8	14, 15, 16	7/8-14 UNF-2B	34	12.5	26	23.9	2.5	20.0	2.4	16.7	15°	3-910
-12	3/4	18, 20	1 1/16-12 UN-2B	41	16.0	32	29.2	3.3	23.0	2.4	19.0	15°	3-912
-14	7/8	22	1 3/16-12 UN-2B	45	18.0	35	32.3	3.3	23.0	2.4	19.0	15°	3-914
-16	1	25, 28	1 5/16-12 UN-2B	49	21.0	38	35.5	3.3	23.0	3.2	19.0	15°	3-916
-20	1 1/4	30, 32, 35	1 5/8-12 UN-2B	58	27.0	48	43.5	3.3	23.0	3.2	19.0	15°	3-920
-24	1 1/2	38, 42	1 7/8-12 UN-2B	65	33.0	54	49.8	3.3	23.0	3.2	19.0	15°	3-924
-32	2	50	2 1/2-12 UN-2B	88	45.0	70	65.7	3.3	23.0	3.2	19.0	15°	3-932

Table U18 — Port Detail — SAE J1926-1 (ISO 11926-1)

- Nominal tube OD is shown for the standard inch sizes and the conversion to equivalent millimeter sizes. Figures are for reference only, as any boss can be used for a tubing size depending upon other design criteria.
- See SAE J846 for more information.
- If face of boss is on a machined surface, dimensions d2 and L3 need not apply as long as corner radius $R_{0.1}^{0.2}$ is maintained.
- Diameter d5 shall be concentric with thread pitch diameter within 0.004 in (0.1mm) FIM, and shall be free from longitudinal and spiral tool marks. Annular tool marks up to 100 μ in (2.5 μ m) max shall be permissible.
- Tap drill depths given require use of bottoming taps to produce the specified full thread lengths. Where standard taps are used, the tap drill depths must be increased accordingly.
- Maximum recommended spotface depth to permit sufficient wrench grip for proper tightening of the fitting or locknut.
- 90 durometer nitrile is standard for hydraulic applications.
- See page U10.

NOTE: For port tapping tools, see page S38. For assembly torques see page T6.


SAE Straight Thread Connector Use in MS33649

SAE straight thread connectors, such as Parker F5OX, need a special hex chamfer of 35° to a controlled diameter to function properly in MS33649 port. In the past, when MS33649 was more popular, Parker fittings were made with this chamfer. However, this port has been superseded by SAE J1926-1 in industrial applications for over 50 years.

Since J1926-1 is a superior design, Parker, along with other manufacturers, discourages the use of MS33649 port in non-aircraft applications. In fact, a chamfer modification requirement for MS33649 will not be in the next printing of the SAE J514 specification, again to discourage the use of this port.

If you must use this port, you have to request fittings with this special chamfer requirement, which makes them special and more expensive.

ISO 6162 — Four-Bolt Flange Connection (Includes SAE J518)

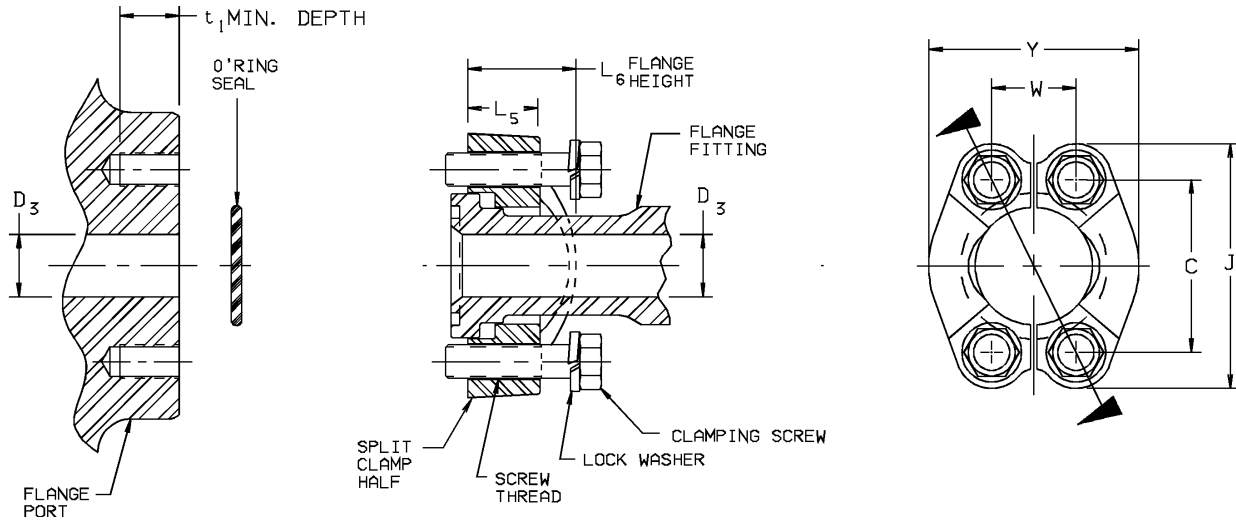

Nominal Flange Size D3		2.5 to 31.5 MPa Series ¹⁾ (SAE Code 61)											O-Rings ³⁾	
		Clamping Screws Screw Holes				Flange Half and Bolt Pattern								
		Type I		Type II ²⁾ (SAE J518)		C ± 0.25	J		W ± 0.25	Y Ref.	L5	L6	ISO 3601-1 ID x Section	Parker O-Ring Size
(in)	(mm)	Thread	t ₁ Min. depth	Thread (UNC)	t ₁ Min. depth		max.	min.						
1/2	13	M8 x 1.25	12.5	5/16 - 18	24	38.1	54.9	53.1	17.5	46	13	19	19 x 3.55	2-210
3/4	19	M10 x 1.5	16.5	3/8 - 16	22	47.6	65.8	64.3	22.3	52	14	22	25 x 3.55	2-214
1	25	M10 x 1.5	14.5	3/8 - 16	22	52.4	70.6	69.1	26.2	59	16	22	32.5 x 3.55	2-219
1 1/4	32	M10 x 1.5	16.5	7/16 - 14	28	58.7	80.3	78.5	30.2	73	14 ⁴⁾	24	37.5 x 3.55	2-222
1 1/2	38	M12 x 1.75	19.5	1/2 - 13	27	69.9	94.5	93.0	35.7	83	16	25	47.5 x 3.55	2-225
2	51	M12 x 1.75	19.5	1/2 - 13	27	77.8	103.1	100.1	42.9	97	16	26	56 x 3.55	2-228
2 1/2	64	M12 x 1.75	21.5	1/2 - 13	30	88.9	115.8	112.8	50.8	109	19	38	69 x 3.55	2-232
3	76	M16 x 2	28.5	5/8 - 11	30	106.4	136.7	133.4	61.9	131	22	41	85 x 3.55	2-237
3 1/2	89	M16 x 2	28.5	5/8 - 11	33	120.7	153.9	150.9	69.9	140	22	28	97.5 x 3.55	2-241
4	102	M16 x 2	25.5	5/8 - 11	30	130.2	163.6	160.3	77.8	152	25	35	112 x 3.55	2-245
5	127	M16 x 2	27.5	5/8 - 11	33	152.4	182.6	185.7	92.1	181	28	41	136 x 3.55	2-253

Nominal Flange Size D3		40 MPa Series ¹⁾ (SAE Code 62)											O-Rings ³⁾	
		Clamping Screws Screw Holes				Flange Half and Bolt Pattern								
		Type I		Type II ²⁾ (SAE J518)		C ± 0.25	J		W ± 0.25	Y Ref.	L5	L6	ISO 3601-1 ID x Section	Parker O-Ring Size
(in)	(mm)	Thread	t ₁ Min. depth	Thread (UNC)	t ₁ Min. depth		max.	min.						
1/2	13	M8 x 1.25	14.5	5/16 - 18	21	40.5	57.2	55.6	18.2	48	16	22	19 x 3.55	2-210
3/4	19	M10 x 1.5	16.5	3/8 - 16	24	50.8	72.1	70.6	23.8	60	19	28	25 x 3.55	2-214
1	25	M12 x 1.75	21.5	7/16 - 14	27	57.2	81.8	80.3	27.8	70	24	33	32.5 x 3.55	2-219
1 1/4	32	M12 x 1.75	18.5	1/2 - 13	25	66.6	96.0	94.5	31.8	78	27	38	37.5 x 3.55	2-222
1 1/2	38	M16 x 2	25.5	5/8 - 11	35	79.3	114.3	111.3	36.5	95	30	43	47.5 x 3.55	2-225
2	51	M20 x 2.5	33.5	3/4 - 10	38	96.8	134.9	131.8	44.5	114	37	52	56 x 3.55	2-228


Table U19 — Port Detail — ISO 6162

- 1) 1 MPa = 10 bar = 145 PSI.
- 2) Not for new design.
- 3) 90 durometer nitrile is standard for hydraulic applications.
- 4) 16 mm is also acceptable.

NOTE: For assembly procedure and torques, see [page T8](#).



ISO 1179-1¹⁾ — Flat Face Port with British Standard Pipe, Parallel (BSPP) Threads (DIN 3852, Part 2) ISO 228-1 “G” Threads

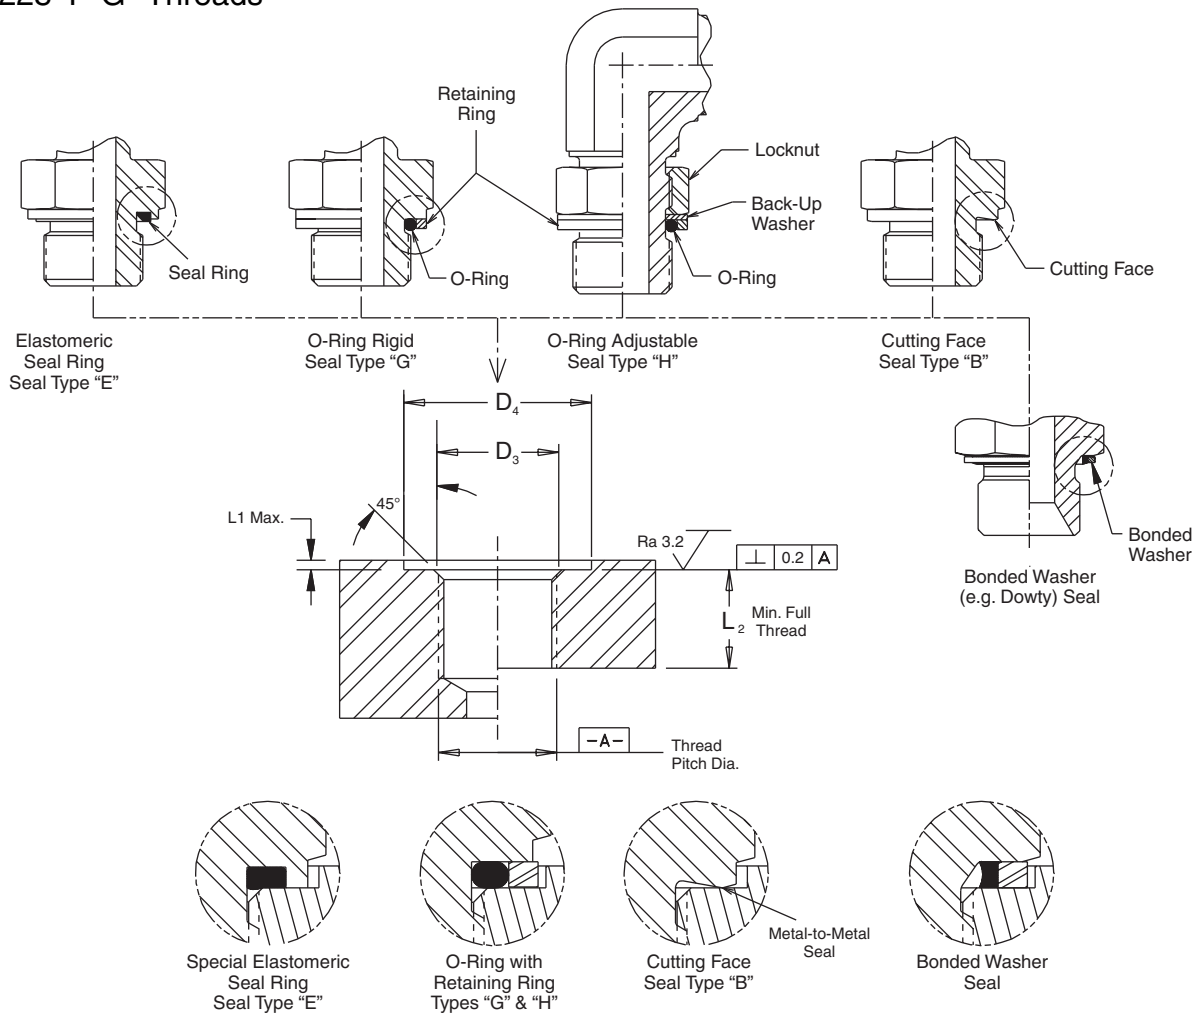

Port Sealing Methods

Thread Size (ISO 228-1)	D3 (mm)	D4 (mm)		L1 max. (mm)	L2 min. (mm)	EOlastic Seal (Type E) Part Number	O-Ring and Retaining Ring (Types G & H) ³			Bonded Washer Part No. ⁴
		Narrow Types B & E	Wide Types G & H				Parker O-Ring Size ²	O-Ring I.D. x Section (mm)	Retaining Ring Part Number	
G 1/8-28	9.9	15	17.2	1.0	8.5	ED10X1X	5-585	7.98 x 1.88	1/8 Retaining Ring	D9DT-2
G 1/4-19	13.3	20	20.7	1.5	12.5	ED14X1.5X	2-111	10.77 x 2.62	1/4 Retaining Ring	D9DT-4
G 3/8 19	16.8	23	24.5	2.0	12.5	EDR3/8X	2-113	13.94 x 2.62	3/8 Retaining Ring	D9DT-6
G 1/2-14	21.1	28	34.0	2.5	14.5	EDR1/2X	5-256	17.96 x 2.62	1/2 Retaining Ring	D9DT-8
G 3/4-14	26.6	33	40.0	2.5	16.5	ED26X1.5X	2-119	23.47 x 2.62	3/4 Retaining Ring	D9DT-10
G 1-11	33.5	41	46.1	2.5	18.5	ED33X2X	2-217	29.74 x 3.53	1 Retaining Ring	D9DT-12
G 1 1/4-11	42.2	51	54.0	2.5	20.5	ED42X2X	2-222	37.69 x 3.53	1 1/4 Retaining Ring	D9DT-16
G 1 1/2-11	48.1	56	60.5	2.5	22.5	ED48X2X	2-224	44.04 x 3.53	1 1/2 Retaining Ring	D9DT-20
G 2-11	59.9	69	73.3	3.0	26.0	—	—	—	—	D9DT-24


Table U20 — Port Detail — ISO 1179-1

- 1) Conforms to proposed revision.
- 2) 90 durometer nitrile is standard for hydraulic applications.
- 3) See page O5 for O-ring and retaining ring ordering information.
- 4) See page O6 for details.

ISO 9974-1 — Flat Face Port with Metric Threads

(DIN 3852, Part 1)

Metric ISO261, “M” Thread

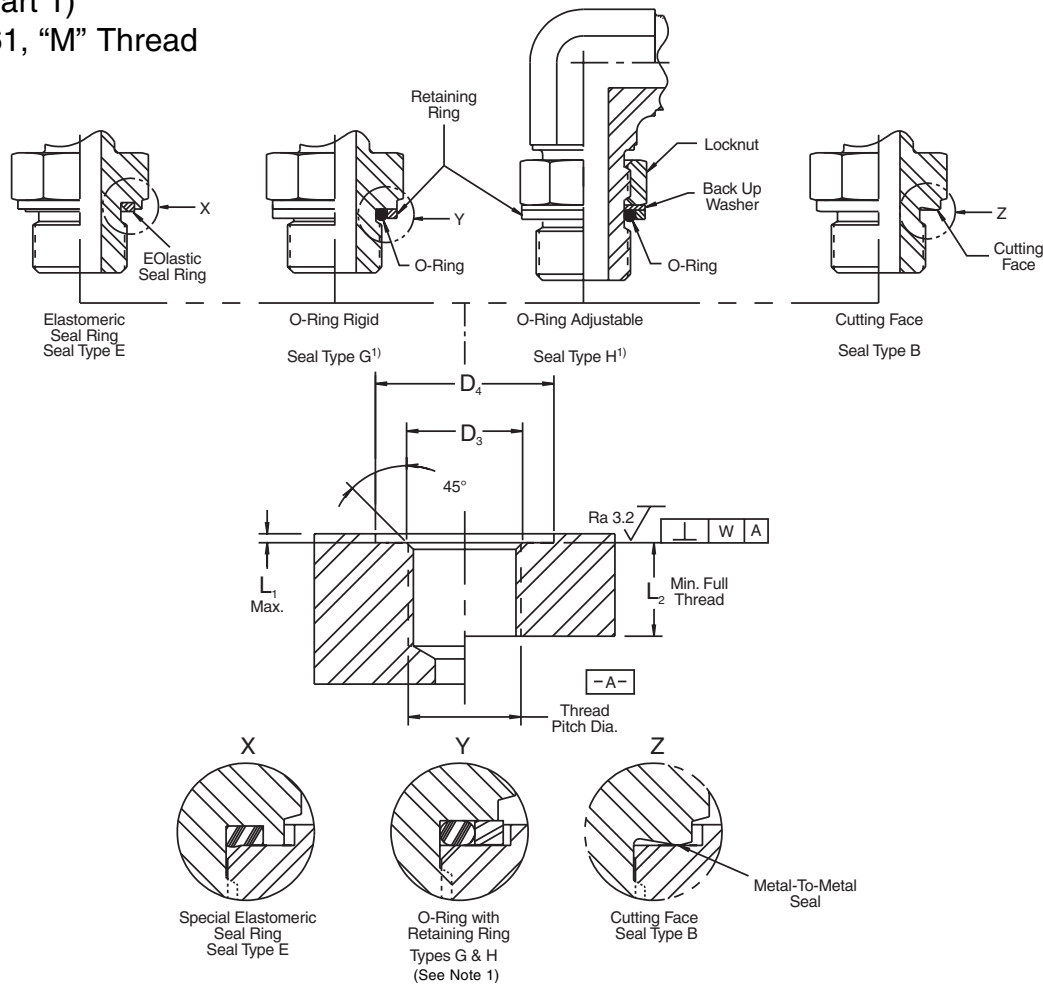


ISO 9974 Port seal types available from Parker

Thread Size (ISO 261)	D 3 (mm)	D 4 (mm)	L 1 max. (mm)	L 2 min. (mm)	W (mm)	O-ring and Retaining Ring ¹⁾			
						Elastic Seal (Type E) Part no.	O-ring Size ²⁾	O-ring ID x section (mm)	Retaining Ring Part No.
M8 x 1	8+0.2	13	1	8	0.1	ED8X1X	3-902	6.07 x 1.63	M8 RR
M10 x 1	10+0.2	15	1	8		ED10X1X	6-074	8.00 x 1.50	M10 RR
M12 x 1.5	12+0.2	18	1.5	12		ED12X1.5X	2-012	9.25 x 1.78	M12 RR
M14 x 1.5	14+0.2	20	1.5	12		ED14X1.5X	2-013	10.82 x 1.78	M14 RR
M16 x 1.5	16+0.2	23	1.5	12		ED16X1.5X	3-907	13.46 x 2.08	M16 RR
M18 x 1.5	18+0.2	25	2	12		ED18X1.5XX	2-114	15.54 x 2.62	M18 RR
M20 x 1.5 ³⁾	20+0.2	27	2	14		ED20X1.5X	2-017	17.17 x 1.78	M20 RR
M22 x 1.5	22+0.2	28	2.5	14		ED22X1.5X	2-018	18.77 x 1.78	M22 RR
M24 x 1.5 ⁴⁾	26+0.2	30	2.5	14		—	2-019	20.35 x 1.78	M24 RR
M26 x 1.5	26+0.2	33	2.5	16		0.2	ED26X1.5X	2-118	21.89 x 2.62
M27 x 2	27+0.2	33	2.5	16	ED26X1.5X		2-119	23.47 x 2.62	M27 RR
M33 x 2	33+0.3	41	2.5	18	ED33X2X		2-122	28.24 x 2.62	M33 RR
M36 x 2 ⁴⁾	36+0.3	43	2.5	18	—		2-124	31.42 x 2.62	M36 RR
M42 x 2	42+0.3	51	2.5	20	ED42X2X		2-128	37.77 x 2.62	M42 RR
M45 x 2 ⁴⁾	45+0.3	50	2.5	20	—		2-130	40.94 x 2.62	M45 RR
M48 x 2	48+0.3	56	2.5	22	ED48X2X		2-132	44.12 x 2.62	M48 RR

Table U21 — Port Detail — ISO 9974-1

- 1) Seal types G and H are not covered in ISO 9974-1. See [page O4](#) for retaining ring and O-ring ordering information.
- 2) 90 durometer nitrile is standard for hydraulic applications.
- 3) For diagnostic applications.
- 4) These sizes are not covered in ISO 9974-1.


NPTF and BSPT Dimensions

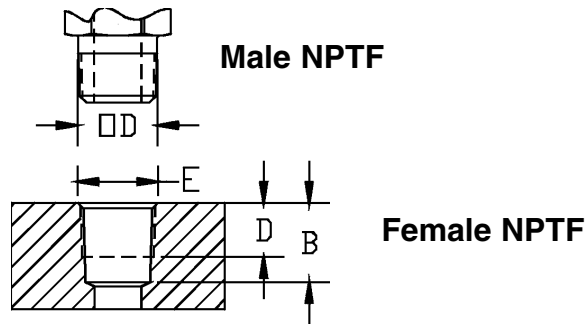

Thread Size NPTF	O.D. Male Thread Large Dia.	D Min. Thread Length	B Min. Tap Drill Depth 1)	E Chmf. Dia.
1/8-27	0.41	0.31	0.38	0.42
1/4-18	0.55	0.44	0.47	0.55
3/8-18	0.68	0.47	0.53	0.69
1/2-14	0.85	0.59	0.69	0.85
3/4-14	1.06	0.63	0.75	1.06
1-11 1/2	1.33	0.75	0.84	1.34
1 1/4-11 1/2	1.67	0.78	0.84	1.68
1 1/2-11 1/2	1.91	0.81	0.88	1.92
2-11 1/2	2.39	0.81	0.91	2.39

Table U22 — NPTF Dimensions

1) For bottoming taps only.

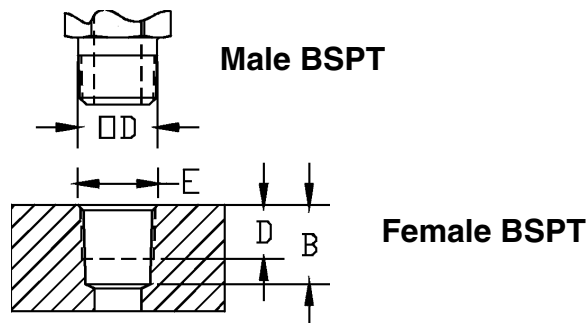

Thread Size BSPT	O.D. Male Thread Large Dia.	D Min. Thread Length	B Min. Tap Drill Depth 1)	E Chmf. Dia.
1/8-28	0.39	0.31	0.38	0.42
1/4-19	0.53	0.44	0.47	0.55
3/8-19	0.67	0.47	0.53	0.69
1/2-14	0.84	0.59	0.69	0.85
3/4-14	1.06	0.63	0.75	1.06
1-11	1.33	0.75	0.84	1.34
1 1/4-11	1.67	0.78	0.84	1.68
1 1/2-11	1.90	0.81	0.88	1.92
2-11	2.37	0.81	0.91	2.39

Table U23 — BSPT Dimensions

1) For bottoming taps only.

Tube to Port¹⁾ Pairing for Medium Pressure²⁾ Applications

Tube O.D.		Port Thread			
Inch (Dash Size)	Metric (mm)	SAE	ISO	NPTF	BSPP
1/8 (-2)	4	5/16-24	M8 x 1	1/16-27	G 1/8-28
3/16 (-3)	5	3/8-24	M10 x 1	1/8-27	G 1/8-28
1/4 (-4)	6	7/16-20	M10 x 1	1/8-27	G 1/8-28
5/16 (-5)	8	1/2-20	M12 x 1.5	1/8-27	G 1/4-19
3/8 (-6)	10	9/16-20	M14 x 1.5	1/4-18	G 1/4-19
1/2 (-8)	12	3/4-16	M16 x 1.5	3/8-18	G 3/8-19
—	15	3/4-16	M18 x 1.5	1/2-14	G 1/2-14
5/8 (-10)	16, 18	7/8-14	M22 x 1.5	1/2-14	G 1/2-14
3/4 (-12)	20	1 1/16-12	M27 x 2	3/4-14	G 3/4-14
7/8 (-14)	22	1 3/16-12	M27 x 2	3/4-14	G 3/4-14
1 (-16)	25, 28	1 5/16-12	M33 x 2	1-11 1/2	G 1-11
1 1/4 (-20)	30, 35	1 5/8-12	M42 x 2	1 1/4-11 1/2	G 1 1/4-11
1 1/2 (-24)	38, 42	1 7/8-12	M48 x 2	1 1/2-11 1/2	G 1 1/2-11
2 (-32)	50	2 1/2-12	M60 x 2	2-11 1/2	G 2-11

Table U24 — Tube to Port Pairing for Medium Pressure Applications

Notes:

- 1) Ports are in accordance with the standards listed below:
SAE J1926-1, ISO 6149-1, NPTF-SAE J476 and BSPP-ISO 1179-1
- 2) The pressure range covering all the sizes shown is 1000 to 5000 PSI.

Tube to Port¹⁾ Pairing for High Pressure²⁾ Applications

Tube O.D.		Port Thread			
Inch (Dash Size)	Metric (mm)	SAE	ISO	NPTF	BSPP
1/8 (-2)	4	5/16-24	M8 x 1	1/16-27	G 1/8-28
3/16 (-3)	5	3/8-24	M10 x 1	1/8-27	G 1/8-28
1/4 (-4)	6	7/16-20	M12 x 1.5	1/8-27	G 1/8-28
5/16 (-5)	8	1/2-20	M14 x 1.5	1/8-27	G 1/4-19
3/8 (-6)	10	9/16-20	M16 x 1.5	1/4-18	G 3/8-19
1/2 (-8)	12	3/4-16	M18 x 1.5	3/8-18	G 3/8-19
5/8 (-10)	14, 16	7/8-14	M22 x 1.5	1/2-14	G 1/2-14
3/4 (-12)	20	1 1/16-12	M27 x 2	3/4-14	G 3/4-14
7/8 (-14)	—	1 3/16-12	M30 x 2	3/4-14	G 3/4-14
1 (-16)	25	1 5/16-12	M33 x 2	1-11 1/2	G 1-11
1 1/4 (-20)	30	1 5/8-12	M42 x 2	1 1/4-11 1/2	G 1 1/4-11
1 1/2 (-24)	38	1 7/8-12	M48 x 2	1 1/2-11 1/2	G 1 1/2-11
2 (-32)	50	2 1/2-12	M60 x 2	2-11 1/2	—

Table U25 — Tube to Port Pairing for High Pressure Applications

Notes:

- 1) Ports are in accordance with the standards listed below.
SAE J1926-1, ISO 6149-1, NPTF-SAE J476 and BSPP-ISO 1179-1
- 2) Pressure range covering all sizes shown is 2500 to 9000 PSI.