




# COLD SAWS

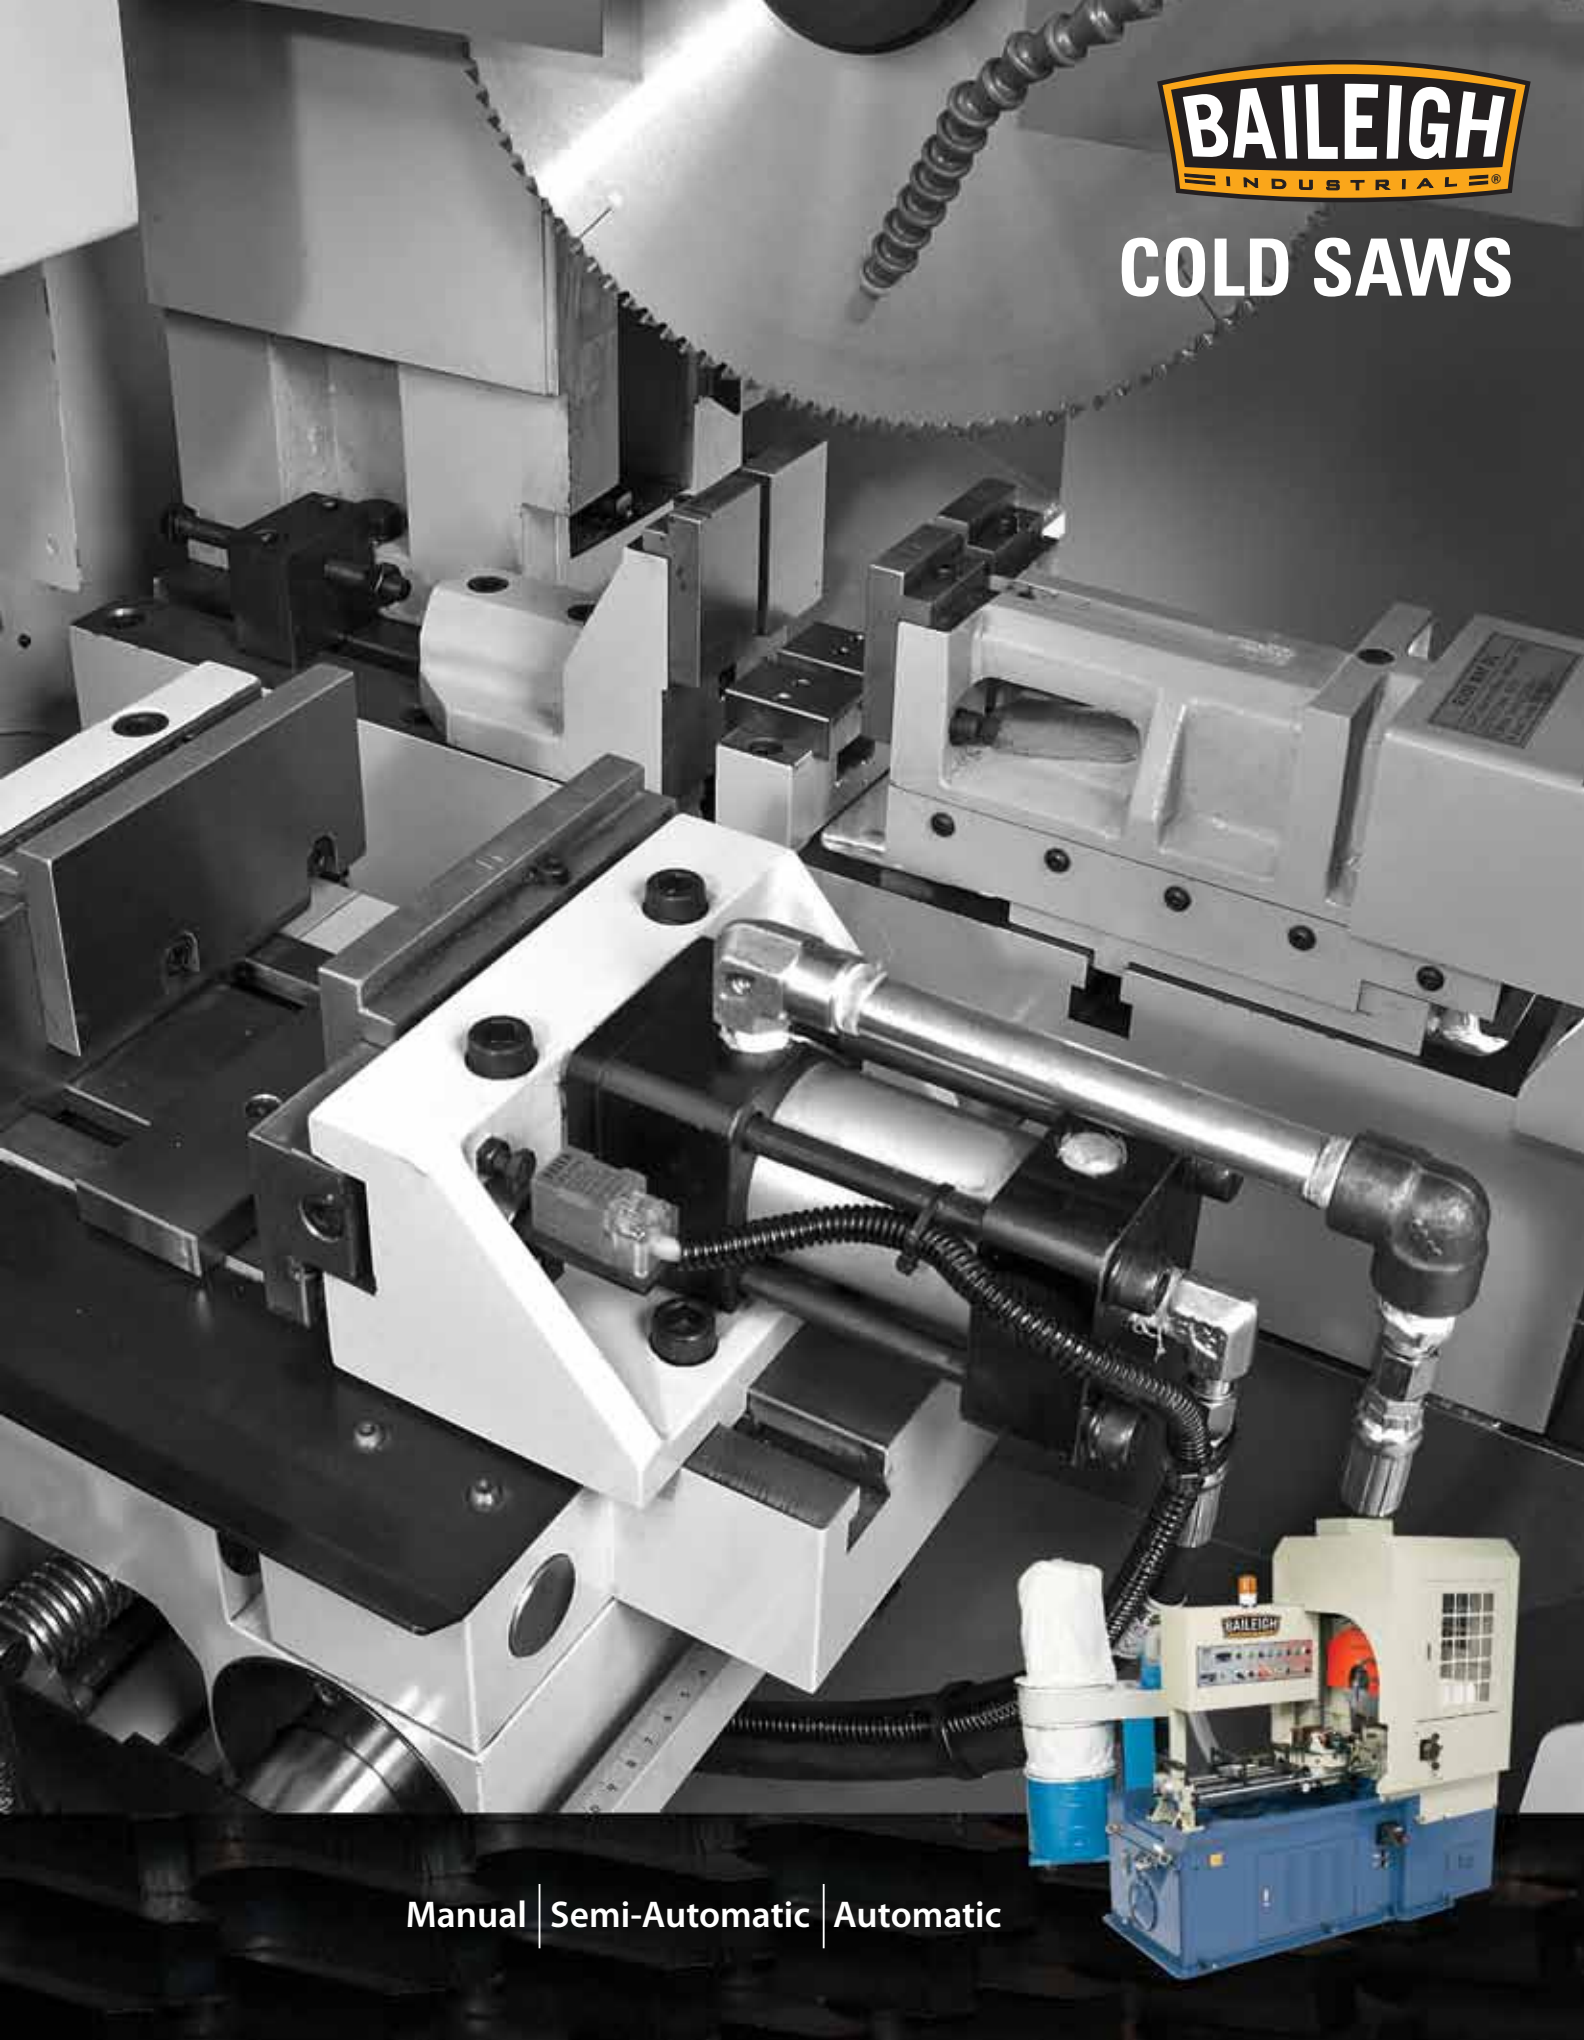

Manual | Semi-Automatic | Automatic

# Metal Cutting COLD SAWS

The Baileigh brand stands for excellent quality and support at a competitive price. That thinking was carried over to all of our cold saws and are built to the highest quality standards on the market today. Using a cold saw to cut tubing and pipe will result in a virtually burr free, machined like finish at a tolerance of .0005". Every cold saw we offer will deliver decades of service in your production or fabrication shop. Baileigh has a cold saw for everyone. Our line of cold saws consists of manual, semi-automatic, and automatic cold saws for all small to high production requirements.

## Manual

Our line of manual cold saws consists of 9 to 14 inch machines that use a circular saw blade that runs at a relatively slow speed amongst a shower of coolant. Each machine comes standard with a cast iron base frame which is both heavy and strong. A cast dual pivot saw head, supported by a swivel base and head support way system, makes the Baileigh cold saw one of most rugged machines on the market.

## Semi-Automatic

The Baileigh industrial heavy duty semi-automatic cold saw line is constructed with rigid castings and industrial grade motors and gear boxes. They are well suited to perform in most any work environment of medium to heavy production. To operate these machines, simply press the foot pedal to clamp the material, start the blade motor and coolant pump, and advance the saw head blade through the material. When finished, the clamping vise opens, the blade motor and coolant pump stop, and the saw head returns to the home position. We also offer semi-automatic column style machines for those shops that need even more capacity.

## Automatic

Baileigh Industrial offers some of the finest automatic cold saws on the market. Our production saw line offers more value for the investment. Baileigh circular cold saws have either a floating feed device or adjustable floating vise and numerical length display unit. An automatic cold saw is required when the manufacturer has requirements for high production runs of round or square tubing, solids, or channel



**BAILEIGH MEANS . . .  
PRECISION. PERFORMANCE.  
PERFECTION.**


Manual



Semi-Automatic



Automatic

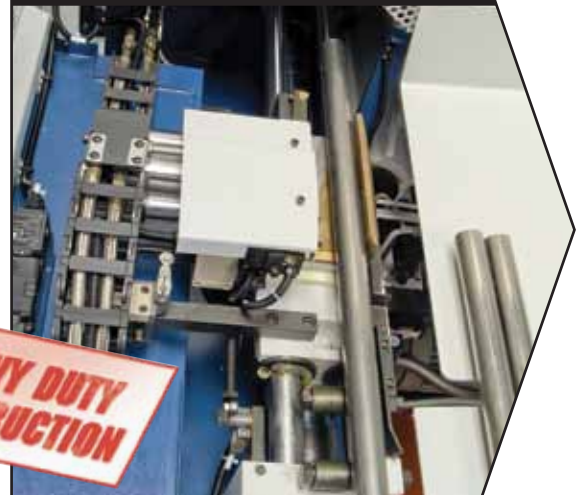

**HEAVY DUTY  
CONSTRUCTION**



## CS-275M

- ◆ 11" blade
- ◆ Miters both ways
- ◆ Stop mechanism
- ◆ Cuts ferrous and non-ferrous metals
- ◆ 2-3/4" capacity
- ◆ 220V 3-phase



## CS-275SA

- ◆ 11" blade
- ◆ Semi-automatic operation (manual feed also available)
- ◆ Miters up to 45° left and right
- ◆ 220V 3-phase



CS-275M		
Mitering Capacities	90°	45°
○	2.75" (69 mm)	2.25" (57 mm)
●	1.5" (38 mm)	1.5" (38 mm)
□	2.75" x 2.75" (69 mm x 69 mm)	2.165" x 2.165" (55 mm x 55 mm)
▣	2.75" x 2.9" (69 mm x 73 mm)	2.165" x 2.25" (55 mm x 57 mm)
Specifications		
Maximum Blade Diameter	11" (275 mm)	
Arbor Size	1.26" (32 mm)	
Blade Speed	Two Speeds, 60 rpm / 120 rpm	
Operation	Manual	
Head Style	Pivot	
Maximum Vise Opening	4.5" (114 mm)	
Vise Style	Dual Action, Self Centering	
Head Miter	90° Slotting, 45° Left / 45° Right	
Slotting Capable	Yes, Left and Right	
Coolant System	Yes	
Motor	3.0 / 1.5 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H)	60" x 44" x 48" (1524 x 1118 x 1219 mm)	
Shipping Weight	724 lbs. (330 kgs.)	

CS-275SA		
Mitering Capacities	90°	45°
○	2.75" (69 mm)	2.25" (57 mm)
●	1.5" (38 mm)	1.5" (38 mm)
□	2.75" x 2.75" (69 mm x 69 mm)	2.165" x 2.165" (55 mm x 55 mm)
▣	2.75" x 2.9" (69 mm x 73 mm)	2.165" x 2.25" (55 mm x 57 mm)
Specifications		
Maximum Blade Diameter	11" (275 mm)	
Arbor Size	1.26" (32 mm)	
Blade Speed	Two Speeds, 60 rpm / 120 rpm	
Operation	Semi-Automatic	
Head Style	Pivot	
Maximum Vise Opening	4" (100 mm)	
Vise Style	Dual Action, Self Centering	
Head Miter	90° Slotting, 45° Left / 45° Right	
Slotting Capable	Yes, Left and Right	
Coolant System	Yes	
Motor	3.0 / 1.5 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H)	60" x 44" x 48" (1524 x 1118 x 1219 mm)	
Shipping Weight	788 lbs. (359 kgs.)	

## CS-350M

- ◆ 14" blade
- ◆ Manual feed
- ◆ Miters up to 45° left and right
- ◆ 220V 3-phase



## CS-350P

- ◆ Pneumatic centering vise
- ◆ Stop mechanism
- ◆ Heavy cast construction
- ◆ Cuts ferrous and non-ferrous metals
- ◆ 4-1/4" capacity
- ◆ 220V 3-phase



**INDUSTRIAL GRADE**



CS-350M		
Mitering Capacities	90°	45°
○	4.331" (110 mm)	2.953" (75 mm)
●	2.362" (60 mm)	1.575" (40 mm)
□	4.25" x 4.25" (108 mm x 108 mm)	2.953" x 2.953" (75 mm x 75 mm)
▭	4.25" x 3.5" (108 mm x 89 mm)	2.953" x 2.362" (75 mm x 60 mm)
Specifications		
Maximum Blade Diameter	14" (350 mm)	
Arbor Size	1.26" (32 mm)	
Blade Speed	Two Speeds, 26 rpm / 52 rpm	
Operation	Manual	
Head Style	Pivot	
Maximum Vise Opening	6.5" (165 mm)	
Vise Style	Dual Action, Self Centering	
Head Miter	90° Slotting, 45° Left / 45° Right	
Slotting Capable	Yes, Left and Right	
Coolant System	Yes	
Motor	4.0 / 3.0 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H)	60" x 44" x 48" (1524 x 1118 x 1219 mm)	
Shipping Weight	820 lbs. (373 kgs.)	

CS-350P		
Mitering Capacities	90°	45°
○	4.331" (110 mm)	2.953" (75 mm)
●	2.362" (60 mm)	1.575" (40 mm)
□	4.25" x 4.25" (108 mm x 108 mm)	2.953" x 2.953" (75 mm x 75 mm)
▭	4.25" x 3.5" (108 mm x 89 mm)	2.953" x 2.362" (75 mm x 60 mm)
Specifications		
Maximum Blade Diameter	14" (350 mm)	
Arbor Size	1.26" (32 mm)	
Blade Speed	Two Speeds, 26 rpm / 52 rpm	
Operation	Manual with Pneumatic Vise	
Head Style	Pivot	
Maximum Vise Opening	6.5" (165 mm)	
Vise Style	Dual Action, Self Centering	
Head Miter	90° Slotting, 45° Left / 45° Right	
Slotting Capable	Yes, Left and Right	
Coolant System	Yes	
Motor	4.0 / 3.0 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H)	60" x 44" x 48" (1524 x 1118 x 1219 mm)	
Shipping Weight	834 lbs. (379 kgs.)	

## CS-350SA

- ◆ Pneumatic centering vise, hydraulic blade descent
- ◆ Automatic shut-off and vise release
- ◆ Stop mechanism
- ◆ Heavy cast construction
- ◆ Cuts ferrous and non-ferrous metals
- ◆ 4-1/4" capacity
- ◆ 220V 3-phase



**INDUSTRIAL  
GRADE**

## CS-C385SA

- ◆ Accepts up to 16" blade
- ◆ Semi-automatic operation
- ◆ Self-centering hydraulic vise
- ◆ Dual miter swivel head
- ◆ Automatic blade shut-off
- ◆ Manual back gauge
- ◆ 220V 3-phase



CS-350SA		
Mitering Capacities	90°	45°
○	4.331" (110 mm)	2.953" (75 mm)
●	2.362" (60 mm)	1.575" (40 mm)
□	4.25" x 4.25" (108 mm x 108 mm)	2.953" x 2.953" (75 mm x 75 mm)
▢	4.25" x 3.5" (108 mm x 89 mm)	2.953" x 2.362" (75 mm x 60 mm)
Specifications		
Maximum Blade Diameter	14" (350 mm)	
Arbor Size	1.26" (32 mm)	
Blade Speed	Two Speeds, 26 rpm / 52 rpm	
Operation	Semi-Automatic	
Head Style	Pivot	
Maximum Vise Opening	6" (153 mm)	
Vise Style	Dual Action, Self Centering	
Head Miter	90° Slotting, 45° Left / 45° Right	
Slotting Capable	Yes, Left and Right	
Coolant System	Yes	
Motor	4.0 / 3.0 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H)	60" x 44" x 48" (1524 x 1118 x 1219 mm)	
Shipping Weight	900 lbs. (410 kgs.)	

CS-C385SA		
Mitering Capacities	90°	45°
○	4.5" (114 mm)	4.25" (108 mm)
●	2.75" (70 mm)	2.36" (60 mm)
□	4.33" x 4.33" (110 mm x 110 mm)	3.93" x 3.93" (100 mm x 100 mm)
▢	4.72" x 1.96" (120 mm x 49 mm)	3.93" x 1.96" (100 mm x 49 mm)
Specifications		
Maximum Blade Diameter	16" (400 mm) 14" (350 mm) standard	
Arbor Size	1.26" (32 mm)	
Blade Speed	Two-Speeds – 35 rpm / 70 rpm	
Operation	Semi-Automatic	
Head Style	Column	
Maximum Vise Opening	6" (153 mm)	
Vise Style	Single Action	
Head Miter	45° Left / 30° Right	
Slotting Capable	No	
Coolant System	Yes	
Motor	4.0 / 3.0 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H)	58" x 33" x 88" (1473 x 838 x 2235 mm)	
Shipping Weight	1,870 lbs. (850 kgs.)	



## CS-C425SA

- ◆ Accepts up to 17" blade
- ◆ Semi-automatic operation
- ◆ Self-centering hydraulic vise
- ◆ Dual miter swivel head
- ◆ Tool gap compensation device
- ◆ Automatic blade shut-off
- ◆ Manual back gauge
- ◆ 220V 3-phase



CS-C425SA		
Mitering Capacities	90°	45°
○	4.92" (125 mm)	4.5" (114 mm)
●	2.75" (70 mm)	2.36" (60 mm)
□	4.33" x 4.33" (110 mm x 110 mm)	3.93" x 3.93" (100 mm x 100 mm)
▭	4.72" x 1.96" (120 mm x 49 mm)	3.93" x 1.96" (100 mm x 49 mm)
Specifications		
Maximum Blade Diameter	17" (425 mm) – 14" (350 mm) standard	
Arbor Size	1.26" (32 mm)	
Blade Speed	Four-Speeds – 35 rpm / 70 rpm & 60 rpm / 120 rpm	
Operation	Semi-Automatic	
Head Style	Column	
Maximum Vise Opening	6" (153 mm)	
Vise Style	Single Action	
Head Miter	45° Left / 30° Right	
Slotting Capable	No	
Coolant System	Yes	
Motor	5.0 / 3.0 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H)	58" x 33" x 84" (1473 x 838 x 2134 mm)	
Shipping Weight	1,870 lbs. (850 kgs.)	

- ◆ Accepts up to 17" blade
- ◆ Inverter driven
- ◆ Semi-automatic operation
- ◆ Self-centering hydraulic vise
- ◆ Dual miter swivel head
- ◆ Tool gap compensation device
- ◆ Automatic blade shut-off
- ◆ Manual back gauge
- ◆ 220V 3-phase

## CS-C485SA

CS-C485SA		
Mitering Capacities	90°	45°
○	4.92" (125 mm)	4.5" (114 mm)
●	2.75" (70 mm)	2.36" (60 mm)
□	4.33" x 4.33" (110 mm x 110 mm)	3.93" x 3.93" (100 mm x 100 mm)
▭	4.72" x 1.96" (120 mm x 49 mm)	3.93" x 1.96" (100 mm x 49 mm)
Specifications		
Maximum Blade Diameter	17" (425 mm) – 14" (350 mm) standard	
Arbor Size	1.26" (32 mm)	
Blade Speed	Inverter Driven – 40 rpm to 240 rpm	
Operation	Semi-Automatic	
Head Style	Column	
Maximum Vise Opening	6" (153 mm)	
Vise Style	Single Action	
Head Miter	45° Left / 30° Right	
Slotting Capable	No	
Coolant System	Yes	
Motor	5.0 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H)	58" x 33" x 88" (1473 x 838 x 2235 mm)	
Shipping Weight	1,898 lbs. (863 kgs.)	



## CS-475AV

- ◆ User-friendly touch screen
- ◆ Heavy duty column feed
- ◆ Automatic work piece feeding, clamping, and cutting
- ◆ Four speeds for cutting ferrous and non-ferrous metals
- ◆ 220V 3-phase

**HEAVY DUTY  
CONSTRUCTION**



## CS-400AV

- ◆ Non-ferrous
- ◆ Blade turns at 3200 rpm
- ◆ Heavy duty column feed
- ◆ Automatic work piece feeding, clamping, and cutting
- ◆ High-speed aluminum saw
- ◆ Includes chip collection device
- ◆ 220V 3-phase



CS-475AV		
Mitering Capacities	90°	45°
○	4.92" (125 mm)	N/A
●	3" (76 mm)	N/A
□	4.92" x 4.92" (125 mm x 125 mm)	N/A
▣	5.11" x 3.15" (129 mm x 80 mm)	N/A
Specifications		
Maximum Blade Diameter	17" (425 mm) – 16" (400 mm) standard	
Arbor Size	1.26" (32 mm)	
Blade Speed	Four Speeds – 35 rpm / 70 rpm & 60 rpm / 120 rpm	
Operation	Automatic	
Head Style	Column	
Maximum Vise Opening	5.9" (150 mm)	
Vise Style	Single Action with Floating Feed	
Head Miter	None	
Slotting Capable	No	
Coolant System	Yes	
Motor	5.0 hp / 3.0 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H)	96" x 72" x 86" (2438 x 1829 x 2184 mm)	
Shipping Weight	3,600 lbs. (1637 kgs.)	

CS-400AV		
Mitering Capacities	90°	45°
○	6" (152 mm)	N/A
●	6" (152 mm)	N/A
□	4.75" x 4.75" (120 mm x 120 mm)	N/A
▣	6" x 2.375" (152 mm x 60 mm)	N/A
Specifications		
Maximum Blade Diameter	18" (455 mm) – 16" (400 mm) standard	
Arbor Size	1" (25.4 mm)	
Blade Speed	3200 rpm	
Operation	Automatic	
Head Style	Column	
Maximum Vise Opening	6" (152 mm)	
Vise Style	Single Action with Floating Feed	
Head Miter	None	
Slotting Capable	No	
Coolant System	Yes	
Motor	5.0 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H)	87" x 52" x 60" (2210 x 1321 x 1524 mm)	
Shipping Weight	3,630 lbs. (1650 kgs.)	

## CS-355M

- ◆ Miters left and right
- ◆ Centering vise
- ◆ Stop mechanism
- ◆ Heavy cast construction
- ◆ Cuts non-ferrous metals
- ◆ Blade turns at 3200 rpm
- ◆ 4-1/4" capacity
- ◆ 220V 3-phase



## CS-355SA

- ◆ Pneumatic centering vise, hydraulic blade descent
- ◆ Automatic shut-off and vise release
- ◆ Stop mechanism
- ◆ Heavy cast construction
- ◆ Cuts ferrous and non-ferrous metals
- ◆ 4-1/4" capacity
- ◆ 220V 3-phase



**HEAVY DUTY  
CONSTRUCTION**

CS-355M		
Mitering Capacities	90°	45°
○	4.331" (110 mm)	2.953" (75 mm)
●	2.362" (60 mm)	1.575" (40 mm)
□	4.25" x 4.25" (108 mm x 108 mm)	2.953" x 2.953" (75 mm x 75 mm)
▣	4.25" x 3.5" (108 mm x 89 mm)	2.953" x 2.362" (75 mm x 60 mm)
Specifications		
Maximum Blade Diameter	14" (350 mm)	
Arbor Size	1" (25.4 mm)	
Blade Speed	3200 rpm	
Operation	Manual	
Head Style	Pivot	
Maximum Vise Opening	6.5" (165 mm)	
Vise Style	Dual Action, Self Centering	
Head Miter	90° Slotting, 45° Left / 45° Right	
Slotting Capable	Yes, Left and Right	
Coolant System	Yes	
Motor	5.5 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H)	60" x 44" x 48" (1524 x 1118 x 1219 mm)	
Shipping Weight	790 lbs. (360 kgs.)	

CS-355SA		
Mitering Capacities	90°	45°
○	4.331" (110 mm)	2.953" (75 mm)
●	2.362" (60 mm)	1.575" (40 mm)
□	4.25" x 4.25" (108 mm x 108 mm)	2.953" x 2.953" (75 mm x 75 mm)
▣	4.25" x 3.5" (108 mm x 89 mm)	2.953" x 2.362" (75 mm x 60 mm)
Specifications		
Maximum Blade Diameter	14" (350 mm)	
Arbor Size	1" (25.4 mm)	
Blade Speed	3200 rpm	
Operation	Semi-Automatic	
Head Style	Pivot	
Maximum Vise Opening	6.5" (165 mm)	
Vise Style	Dual Action, Self Centering	
Head Miter	90° Slotting, 45° Left / 45° Right	
Slotting Capable	Yes, Left and Right	
Coolant System	Yes	
Motor	5.5 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H)	60" x 44" x 48" (1524 x 1118 x 1219 mm)	
Shipping Weight	798 lbs. (363 kgs.)	



## CS-70NC



- ◆ 11" carbide blade
- ◆ Full automatic magazine style material feed system
- ◆ 19' in-feed table
- ◆ User friendly touch screen control
- ◆ 220V 3-phase

CS-70NC		
Mitering Capacities	90°	45°
○	2.36" (60 mm)	N/A
●	2.36" (60 mm)	N/A
□	2.36" x 2.36" (60 mm x 60 mm)	N/A
▤	2.36" x 2.36" (60 mm x 60 mm)	N/A
Specifications		
Maximum Blade Diameter	11" (285 mm)	
Arbor Size	1.26" (32 mm)	
Blade Speed	Inverter Driven – 17 rpm to 200 rpm	
Operation	Automatic with Magazine Feeder	
Head Style	Pivot	
Maximum Vise Opening	3.5" (89 mm)	
Vise Style	Single Action with Hydraulic Feed	
Head Miter	None	
Slotting Capable	No	
Coolant System	Yes	
Motor	10 hp	
Electrical Requirements	220V, 3-Phase	
Shipping Dimensions (L x W x H) – 2 Crates	195" x 44" x 64" (4953 x 1118 x 1626 mm)	
	135" x 90" x 102" (3429 x 2286 x 2591 mm)	
Shipping Weight	5,800 lbs. (2637 kgs.)	

**INDUSTRIAL  
GRADE**

## A Saw to Fit Your Needs

Do you have an application that calls for a special saw? Baileigh Industrial has a machine that will fit your requirement. Whether it be for large diameter material that requires a delicate touch, or a specific project you have in mind, give one of our knowledgeable customer service representatives a call today to fit those needs at 920-684-4990.



CS-130NC

## CS-225M

- ◆ 9" blade
- ◆ Manual feed
- ◆ Integrated coolant system
- ◆ Bench top model
- ◆ Miters up to 45° left
- ◆ 110V



CS-225M		
Mitering Capacities	90°	45°
○	2.5" (63 mm)	2.125" (54 mm)
●	1.75" (44 mm)	1.5" (38 mm)
□	2.25" x 2.25" (57 mm x 57 mm)	2" x 2" (50 mm x 50 mm)
Specifications		
Maximum Blade Diameter	9" (225 mm)	
Arbor Size	1.26" (32 mm)	
Blade Speed	50 rpm	
Operation	Manual	
Head Style	Pivot	
Maximum Vise Opening	2.75" (70 mm)	
Vise Style	Dual Action, Self Centering	
Head Miter	45°	
Slotting Capable	No	
Coolant System	Yes	
Motor	1 hp	
Electrical Requirements	110V	
Shipping Dimensions (L x W x H)	25" x 15" x 28" (635 x 381 x 711 mm)	
Shipping Weight	187 lbs. (85 kgs.)	

## CS-250EU

- ◆ 10" blade
- ◆ Manual feed
- ◆ Miters up to 45° left and right
- ◆ 110V



CS-250EU		
Mitering Capacities	90°	45°
○	3" (75 mm)	3" (75 mm)
●	1.2" (30 mm)	1.2" (30 mm)
□	2.5" x 2.5" (65 mm x 65 mm)	2.2" x 2.2" (55 mm x 55 mm)
□	2.5" x 2" (65 mm x 50 mm)	2.4" x 2" (60 mm x 50 mm)
Specifications		
Maximum Blade Diameter	10" (250 mm)	
Arbor Size	1.26" (32 mm)	
Blade Speed	54 rpm	
Operation	Manual	
Head Style	Pivot	
Maximum Vise Opening	4" (100 mm)	
Vise Style	Single Action with Cam Lock	
Head Miter	45° Left / 45° Right	
Slotting Capable	No	
Coolant System	Yes	
Motor	1 hp	
Electrical Requirements	110V	
Shipping Dimensions (L x W x H)	60" x 44" x 48" (1524 x 1118 x 1219 mm)	
Shipping Weight	375 lbs. (170 kgs.)	

## CS-275EU

- ◆ 11" blade
- ◆ Manual feed
- ◆ Miters up to 45° left and right
- ◆ 110V



CS-275EU		
Mitering Capacities	90°	45°
○	3.25" (85 mm)	3.25" (85 mm)
●	1.5" (40 mm)	1.5" (40 mm)
□	3" x 3" (75 mm x 75 mm)	2.2" x 2.2" (55 mm x 55 mm)
□	3.5" x 2" (90 mm x 50 mm)	2.4" x 2" (60 mm x 50 mm)
Specifications		
Maximum Blade Diameter	11" (275 mm)	
Arbor Size	1.26" (32 mm)	
Blade Speed	54 rpm	
Operation	Manual	
Head Style	Pivot	
Maximum Vise Opening	4" (100 mm)	
Vise Style	Single Action with Cam Lock	
Head Miter	45° Left / 45° Right	
Slotting Capable	No	
Coolant System	Yes	
Motor	1.5 hp	
Electrical Requirements	110V	
Shipping Dimensions (L x W x H)	60" x 44" x 48" (1524 x 1118 x 1219 mm)	
Shipping Weight	425 lbs. (194 kgs.)	



## CS-315EU

- ◆ 12.5" blade
- ◆ Manual feed
- ◆ Miters up to 45° left and right
- ◆ 220V, 1-phase



**HEAVY DUTY  
CONSTRUCTION**

## CS-350EU

- ◆ 14" blade
- ◆ Variable speed inverter driven
- ◆ Digital readout for rpm
- ◆ Miters 45° left and right
- ◆ 220V, 1-phase



CS-315EU		
Mitering Capacities	90°	45°
○	4" (100 mm)	4" (100 mm)
●	2" (50 mm)	2" (50 mm)
□	3.2" x 3.2" (82 mm x 82 mm)	3.2" x 3.2" (82 mm x 82 mm)
▣	4.25" x 2.75" (110 mm x 70 mm)	3.25" x 2.75" (85 mm x 70 mm)
Specifications		
Maximum Blade Diameter	12.5" (317 mm)	
Arbor Size	1.26" (32 mm)	
Blade Speed	52 rpm	
Operation	Manual	
Head Style	Pivot	
Maximum Vise Opening	4.72" (120 mm)	
Vise Style	Single Action with Cam Lock	
Head Miter	45° Left / 45° Right	
Slotting Capable	No	
Coolant System	Yes	
Motor	2.5 hp	
Electrical Requirements	220V, 1-Phase	
Shipping Dimensions (L x W x H)	40" x 40" x 72" (1016 x 1016 x 1829 mm)	
Shipping Weight	500 lbs. (228 kgs.)	

CS-350EU		
Mitering Capacities	90°	45°
○	4.7" (120 mm)	4" (100 mm)
●	3.5" (90 mm)	3" (75 mm)
□	4" x 4" (100 mm x 100 mm)	3.5" x 3.5" (90 mm x 90 mm)
▣	6.3" x 3.5" (160 mm x 90 mm)	3.5" x 2.8" (90 mm x 70 mm)
Specifications		
Maximum Blade Diameter	14" (350 mm)	
Arbor Size	1.26" (32 mm)	
Blade Speed	24 – 120 rpm	
Operation	Manual	
Head Style	Pivot	
Maximum Vise Opening	4.7" (120 mm)	
Vise Style	Single Action with Cam Lock	
Head Miter	45° Left / 45° Right	
Slotting Capable	No	
Coolant System	Yes	
Motor	3 hp	
Electrical Requirements	220V, 1-Phase	
Shipping Dimensions (L x W x H)	60" x 44" x 48" (1524 x 1118 x 1219 mm)	
Shipping Weight	550 lbs. (250 kgs.)	



BAILEIGH INDUSTRIAL INC.  
1625 Dufek Drive  
Manitowoc, WI 54220  
Tel 920.684.4990  
Fax 920.684.3944  
[www.bii1.com](http://www.bii1.com)

BAILEIGH INDUSTRIAL INC.  
1455 South Campus Avenue  
Ontario, CA 91761  
Tel 920.684.4990  
Fax 920.684.3944

BAILEIGH INDUSTRIAL LTD.  
Unit 1 Fullwood Close  
Aldermans Green Industrial Estate  
Coventry, CV2 2SS  
United Kingdom  
Tel +44 (0)24 7661 9267  
Fax +44 (0)24 7661 9276  
[www.bifabuk.co.uk](http://www.bifabuk.co.uk)

Distributed By:

*Specifications and machines appearances are subject to change without notice.*